





EUPHORIA

**1200
X
2400
MM**

MIGHTY SIZE



1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

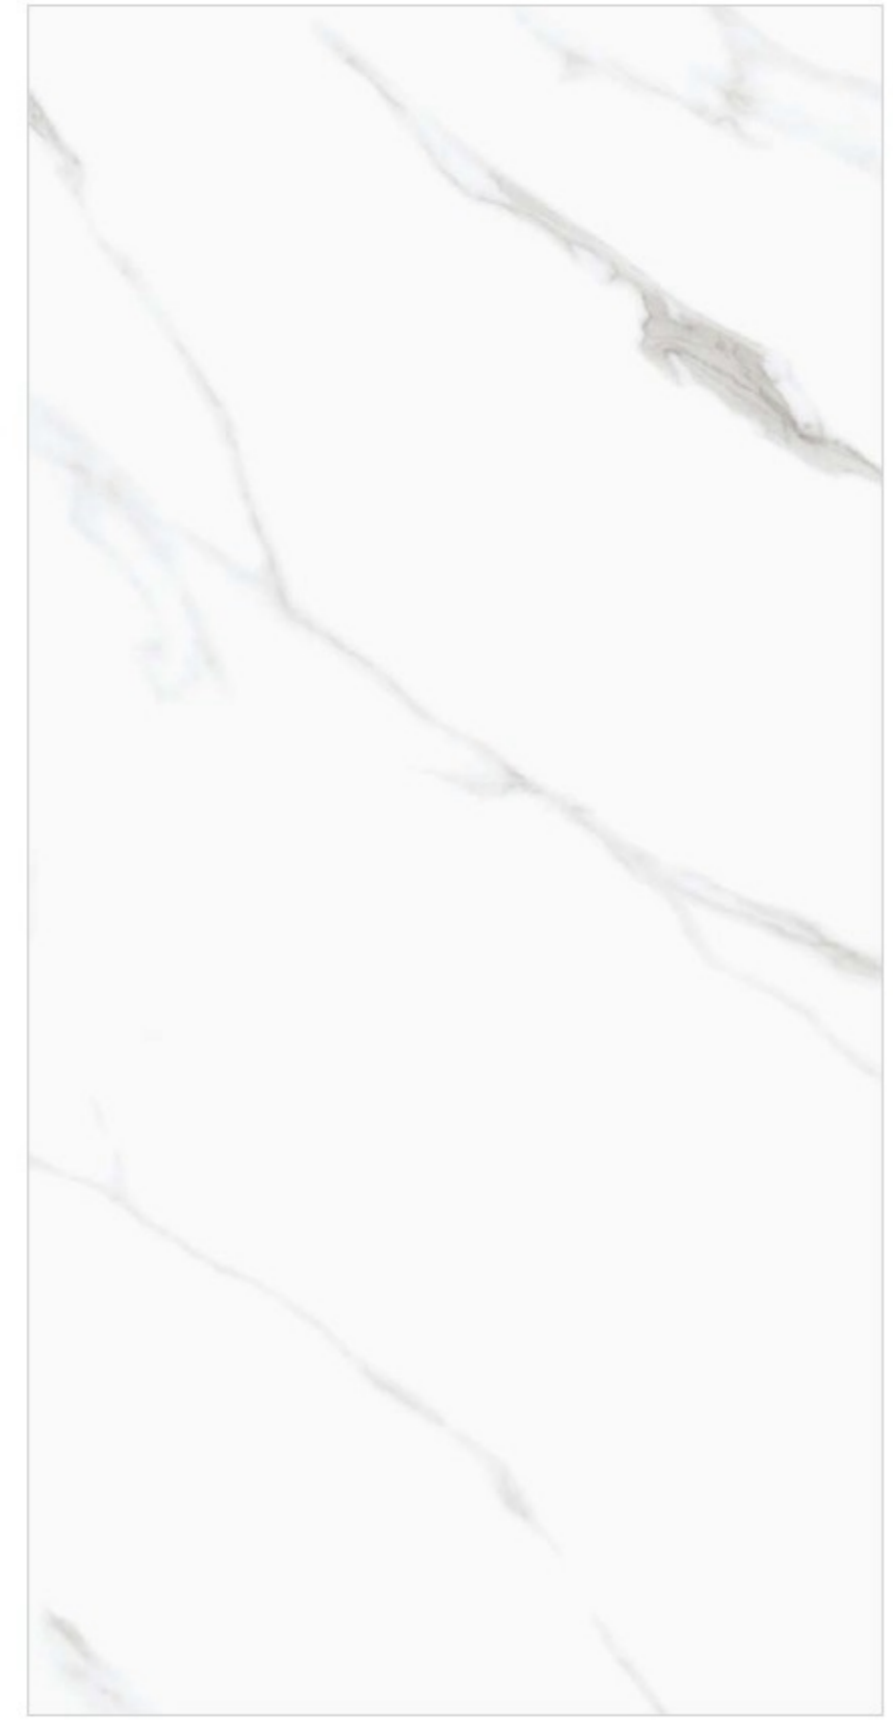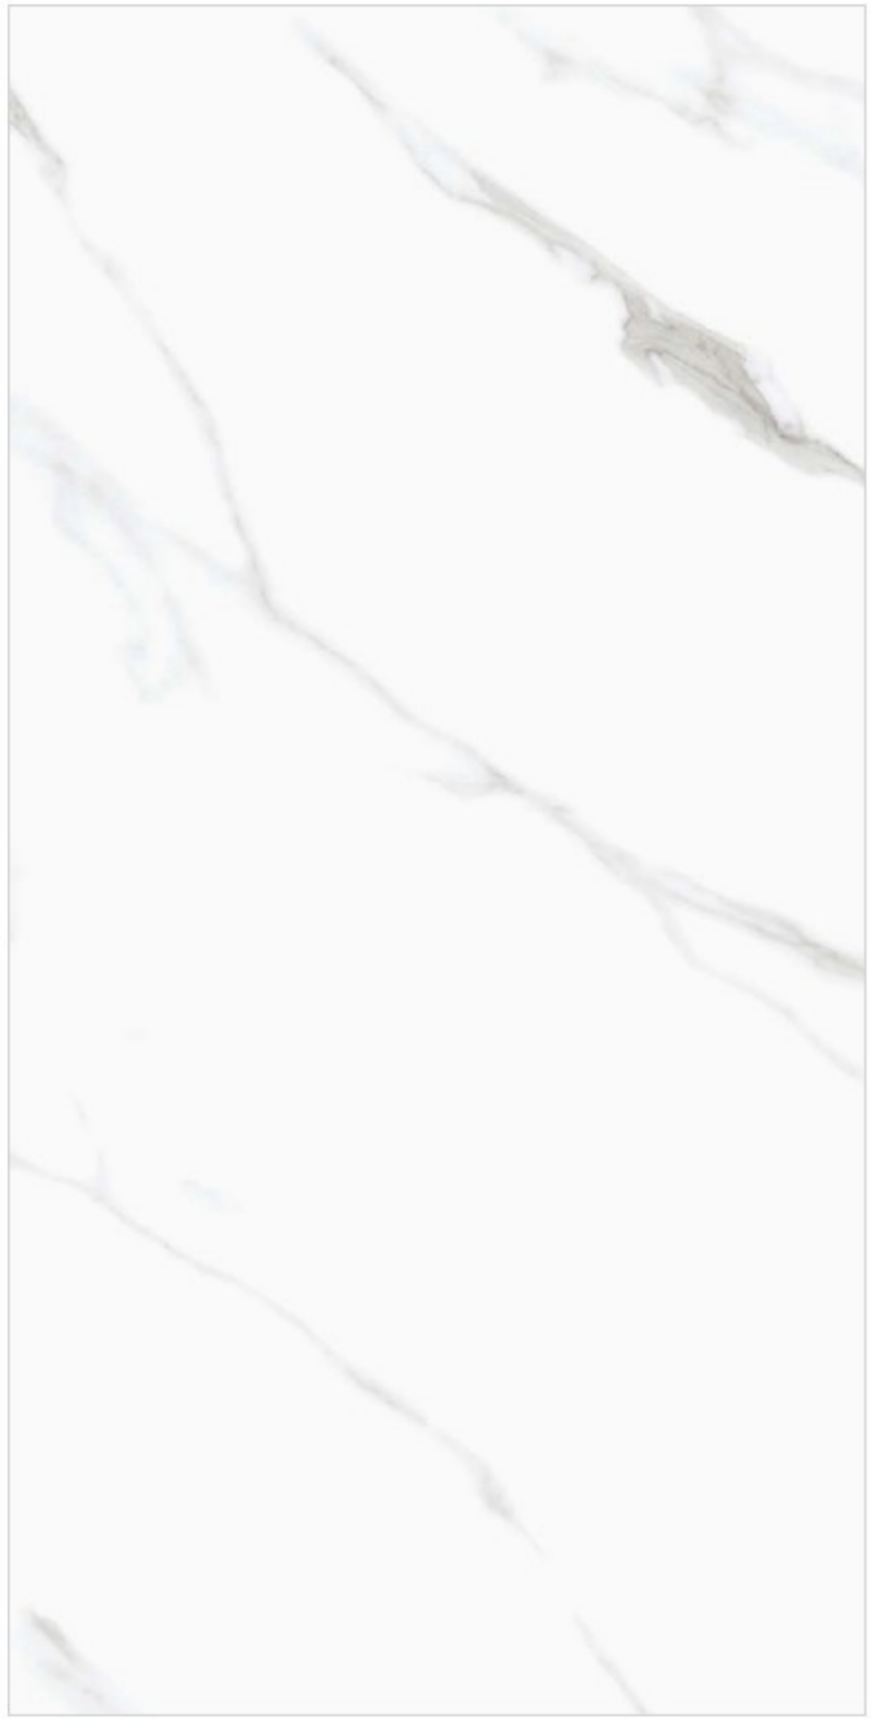


ARCTIC WHITE 2 RANDOM

ARCTIC WHITE (BOOK MATCH) BOOK MATCH A+B

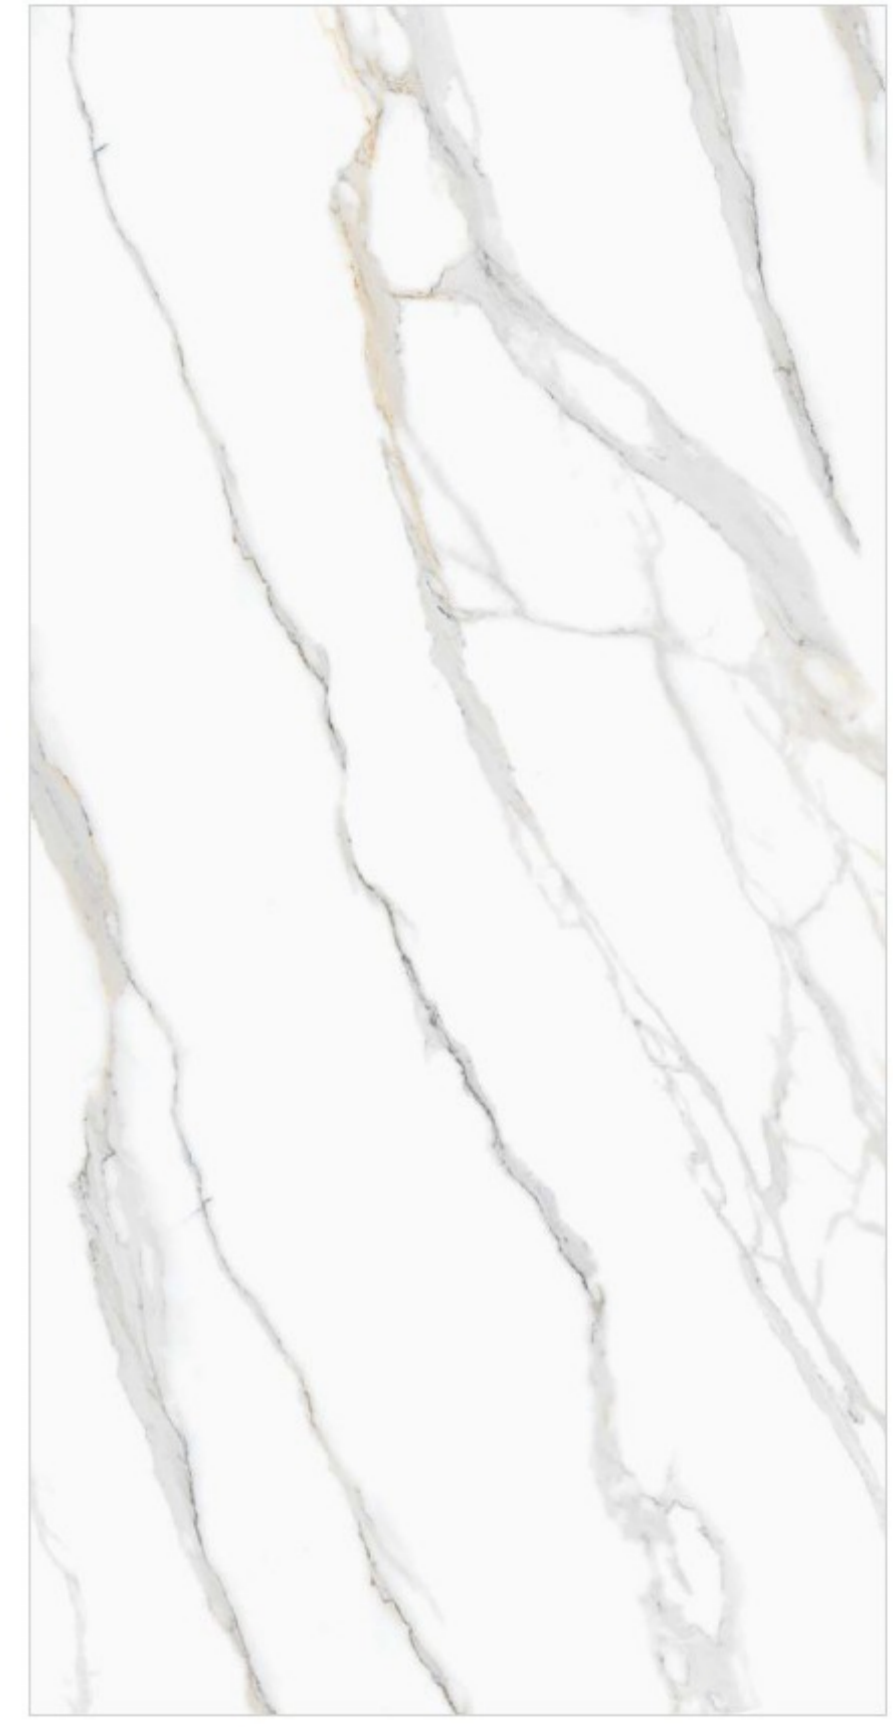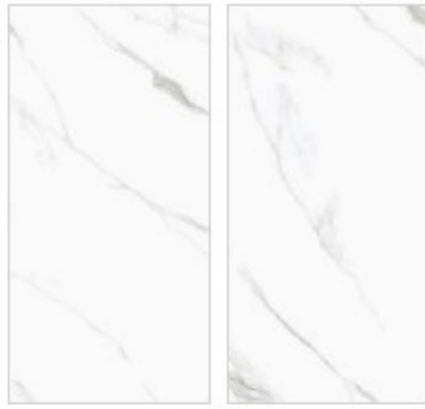

CLRYS WHITE 3 RANDOM

IMPERIAL WHITE (CONTINUE) 3 FACE CONTINUE

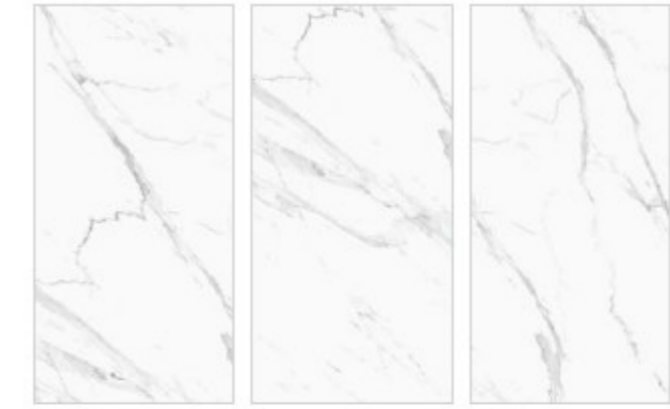

1200x
2400mm **HIGH GLOSSY FINISH** 9 mm thickness





Versatile solutions Easier to lay Resistant to chemical Resistant to loads Resistant to stains Wide range




ALTIMO WHITE 2 RANDOM

ALTIMO WHITE (BOOK MATCH) BOOK MATCH A+B

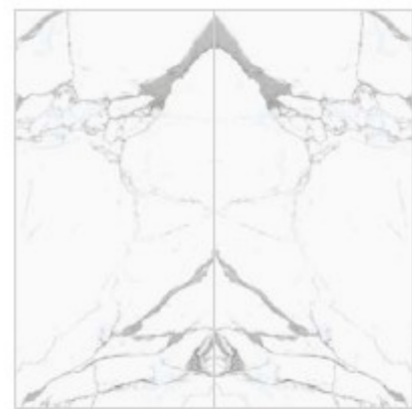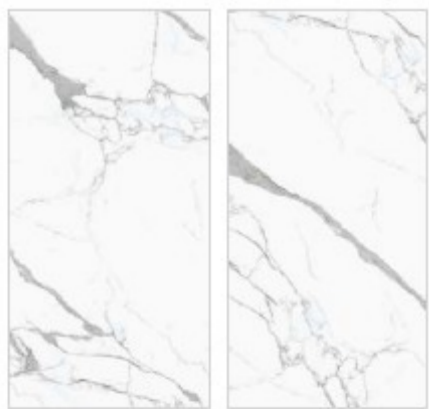


DIAMOND WHITE 2 RANDOM

DIAMOND WHITE (CONTINUE) 4 FACE CONTINUE

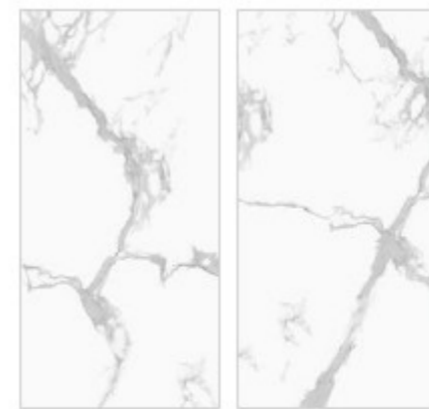





1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

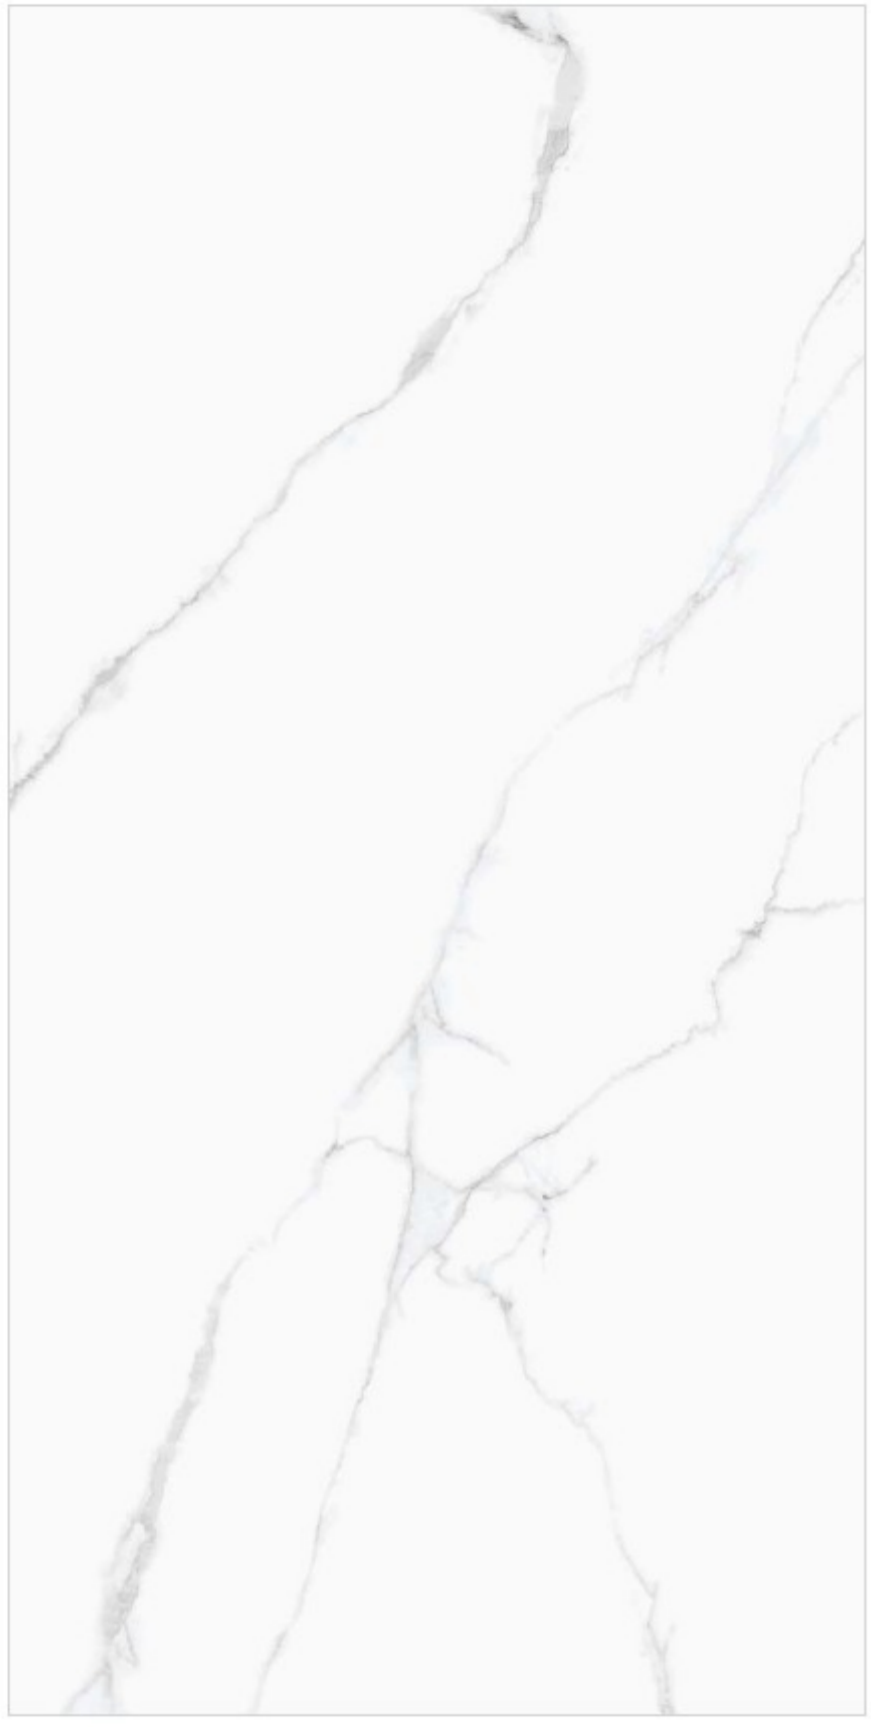

ATLANTIC WHITE 2 RANDOM

ATLANTIC WHITE (CONTINUE) 2 FACE CONTINUE

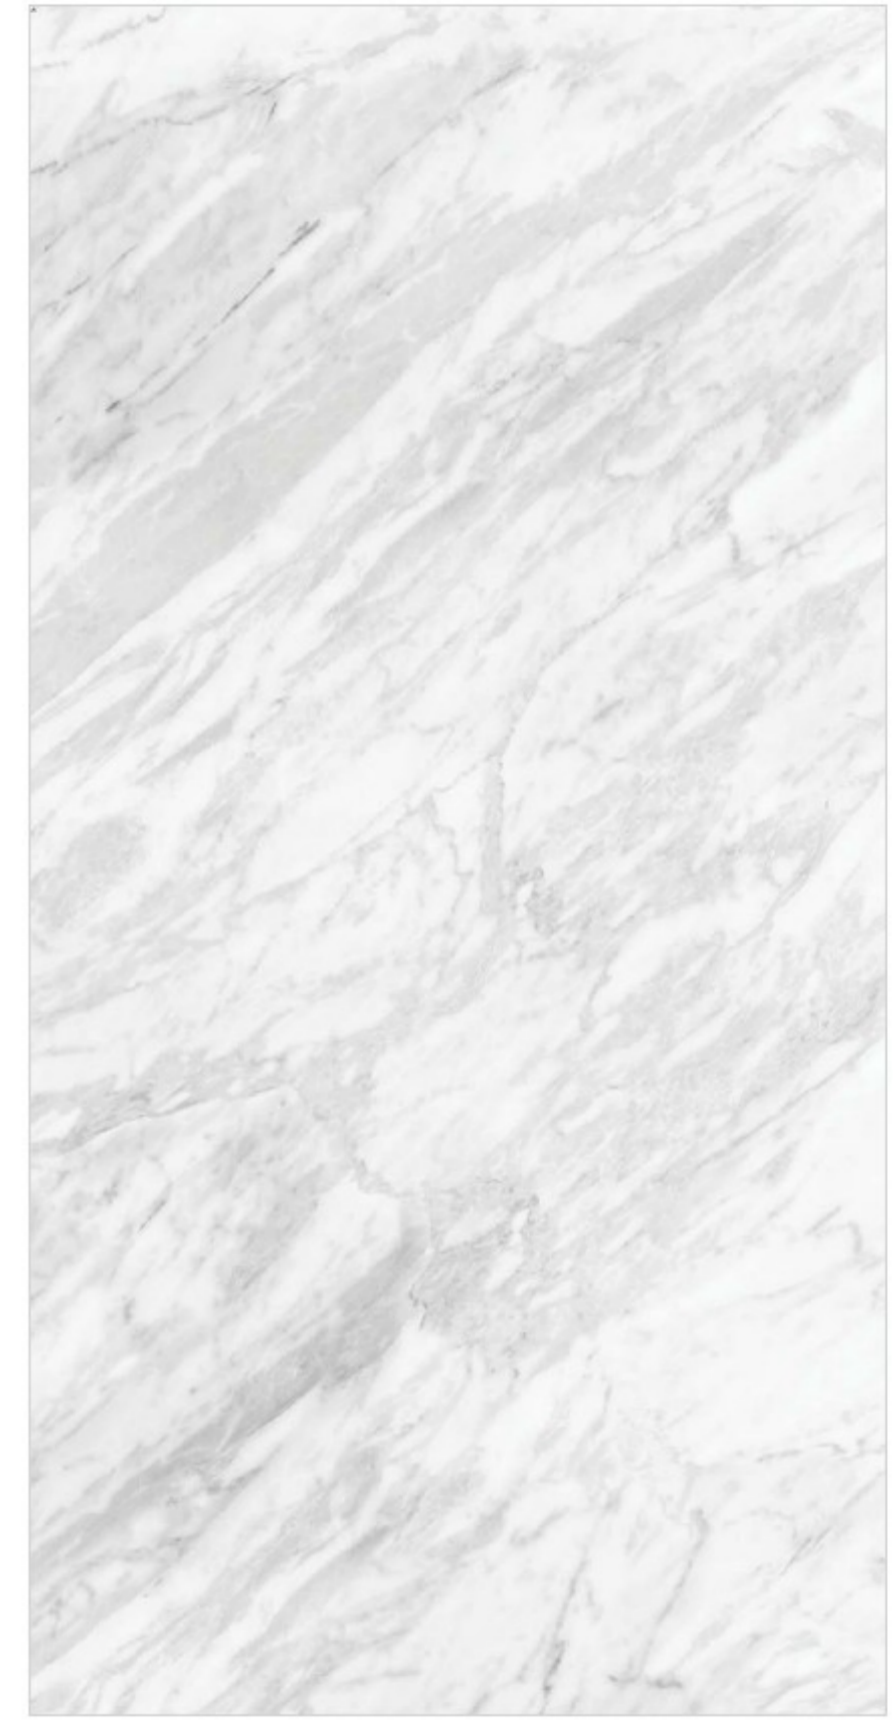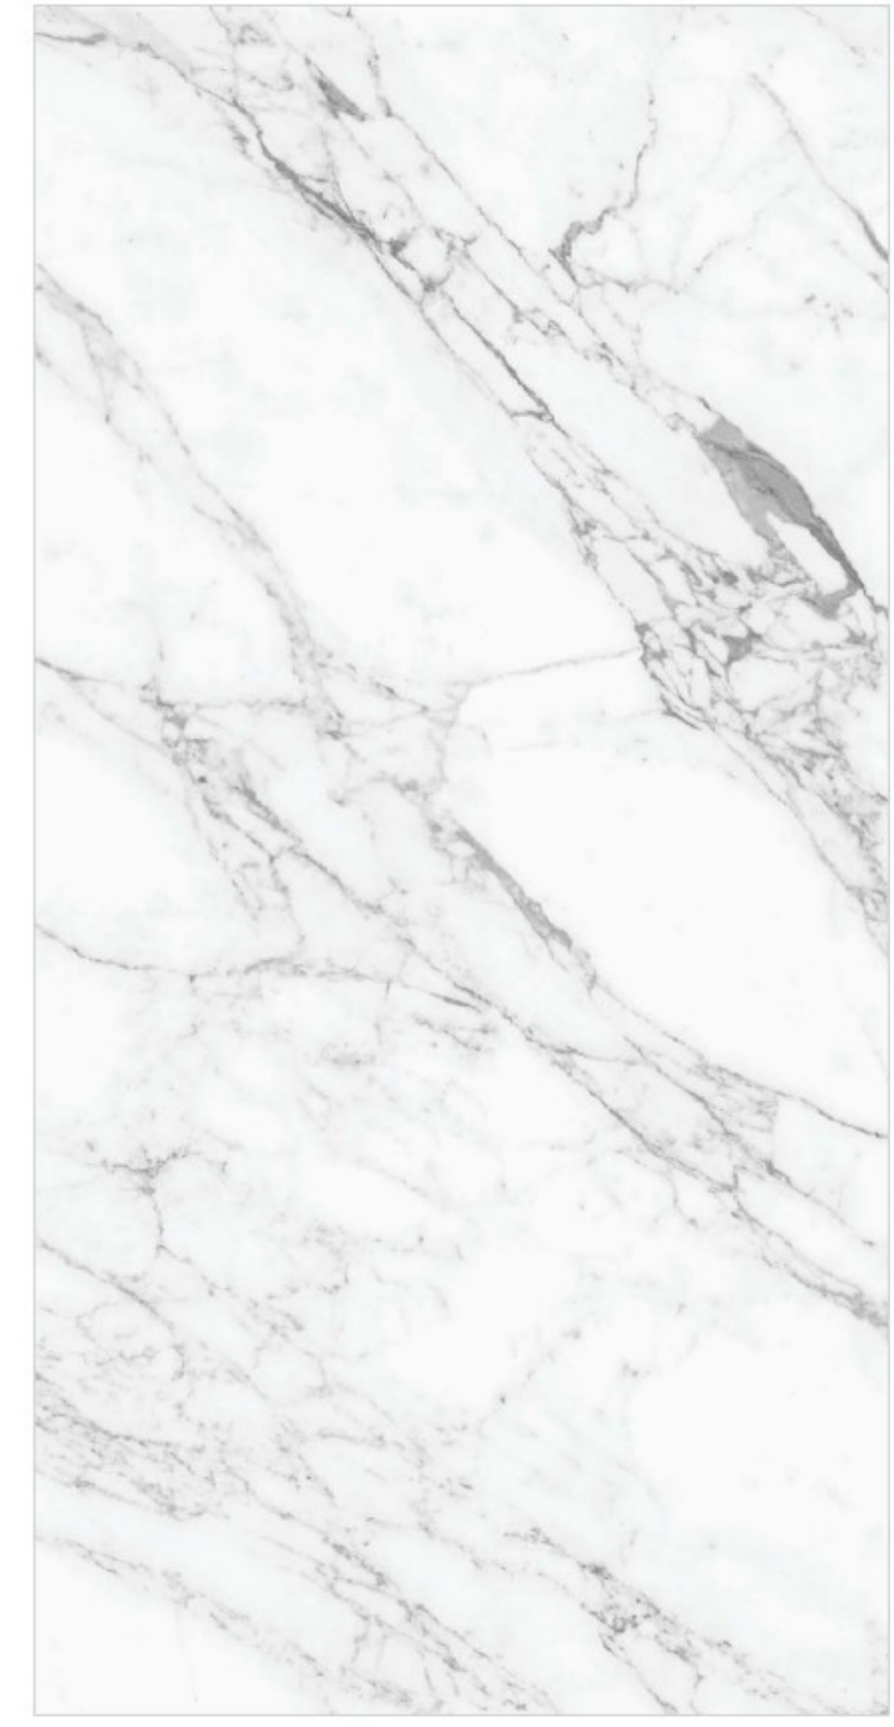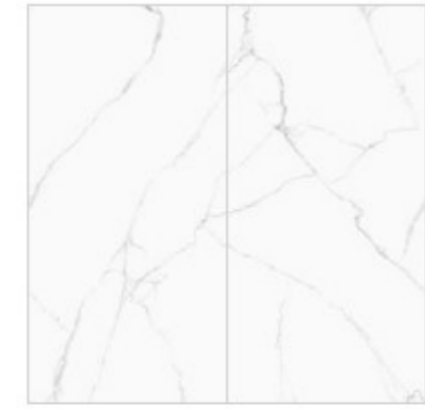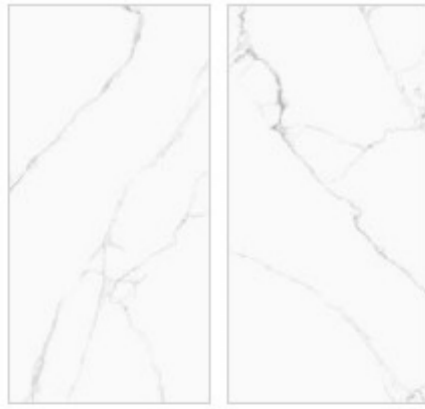

PEARL WHITE (CONTINUE) 3 FACE CONTINUE

CRISTAL WHITE 3 RANDOM






WALL : ATLANTIC WHITE | FLOOR : ATLANTIC WHITE



1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

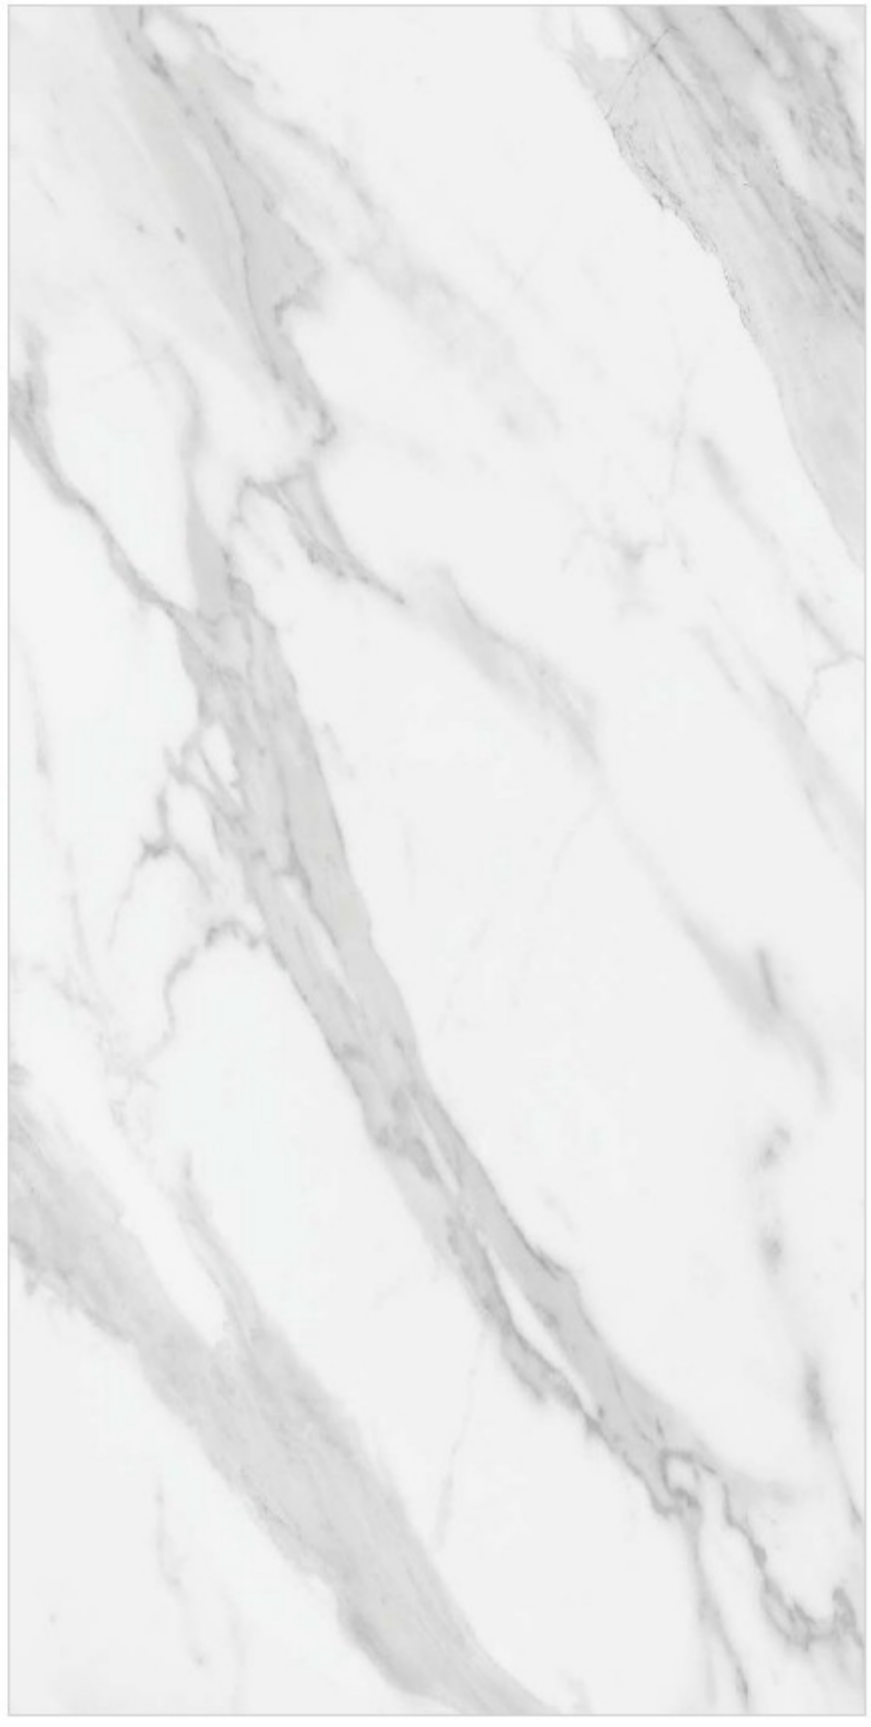


GLORIOUS WHITE (CONTINUE) 3 FACE CONTINUE

GLORIOUS WHITE (BOOK MATCH) BOOK MATCH A+B

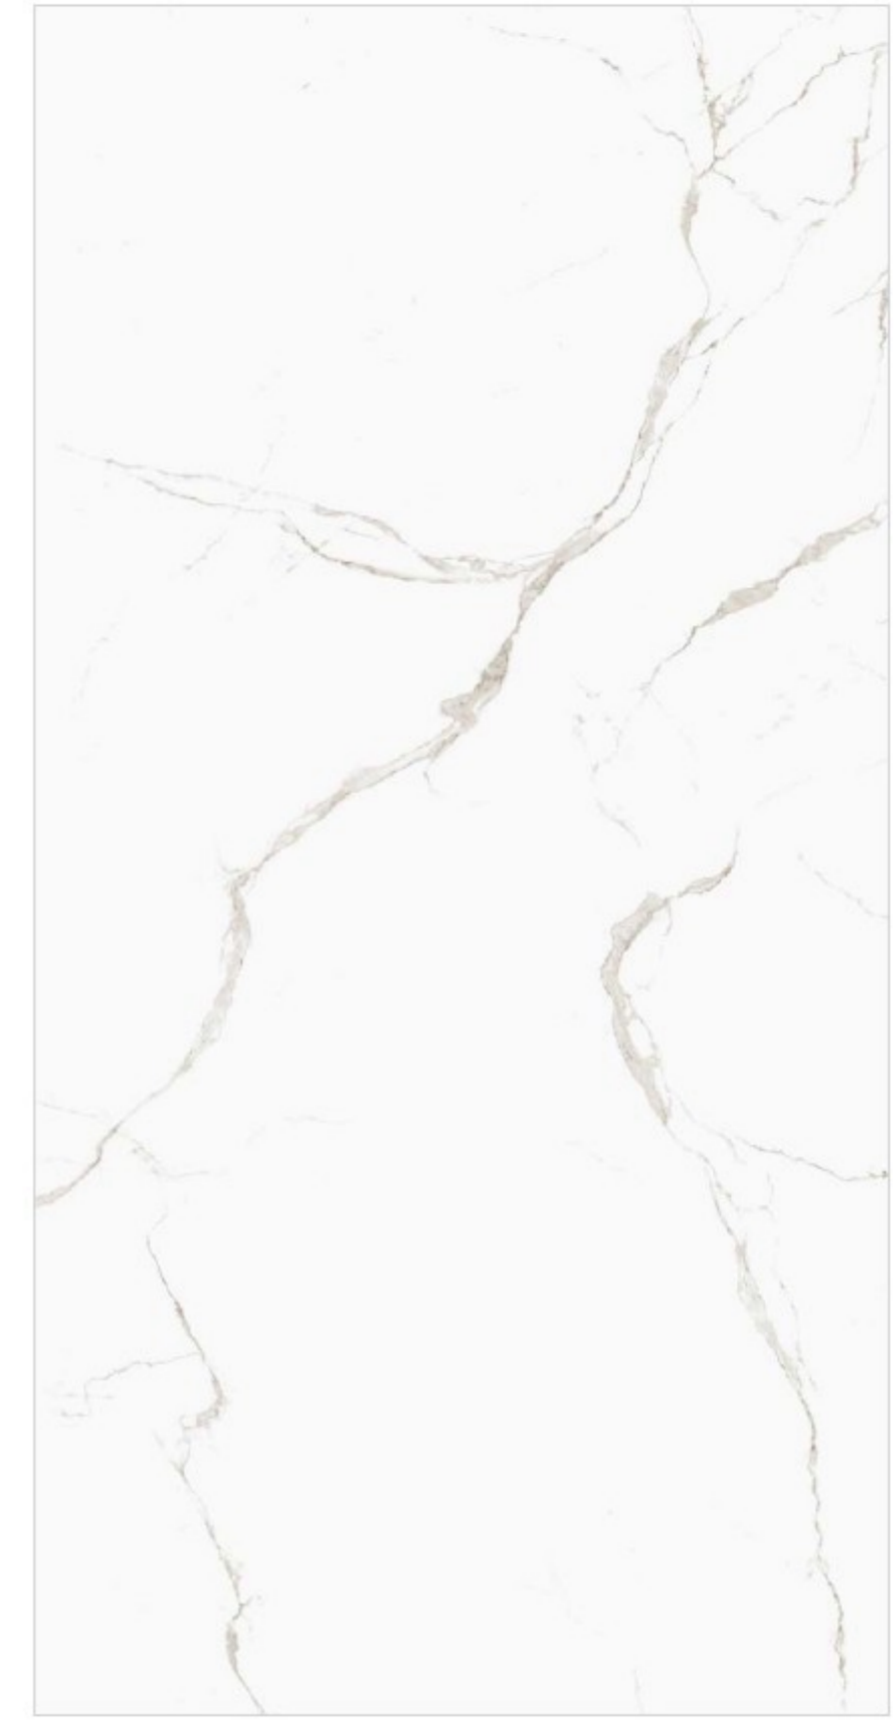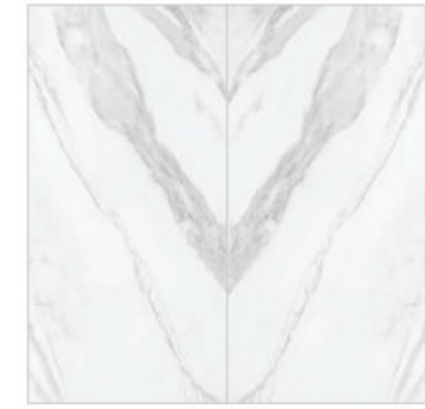


STATUARIO FANTASTICO 4 RANDOM

STATUARIO NATURAL 3 RANDOM

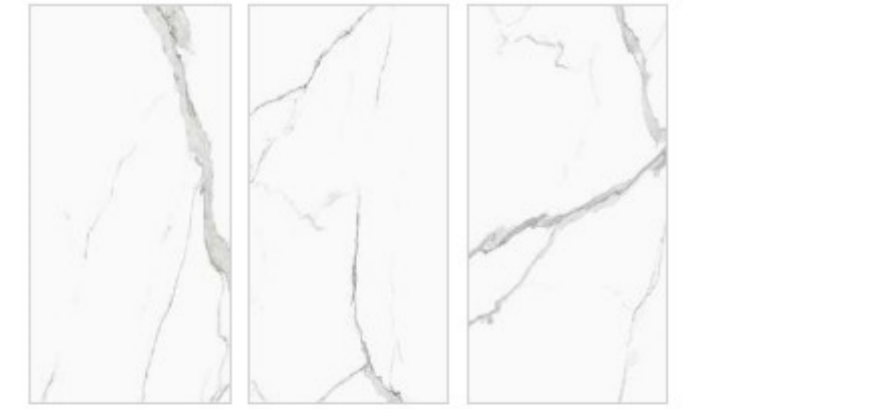

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

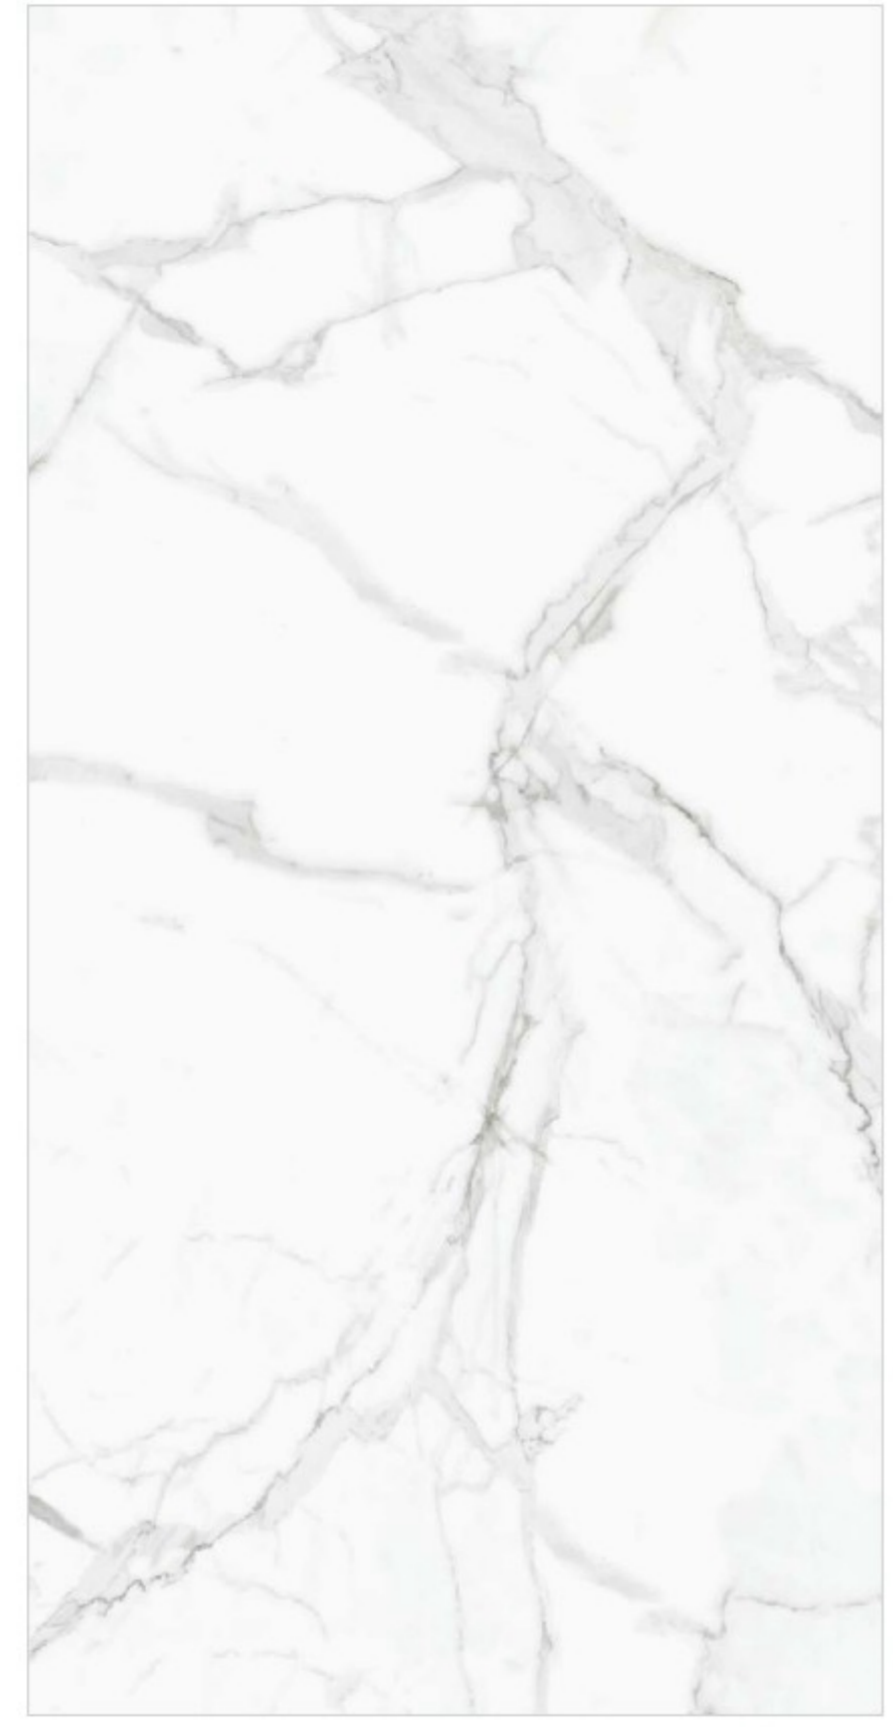

STATUARIO RIO 3 RANDOM

STATUARIO BELGIA (CONTINUE) 3 FACE CONTINUE


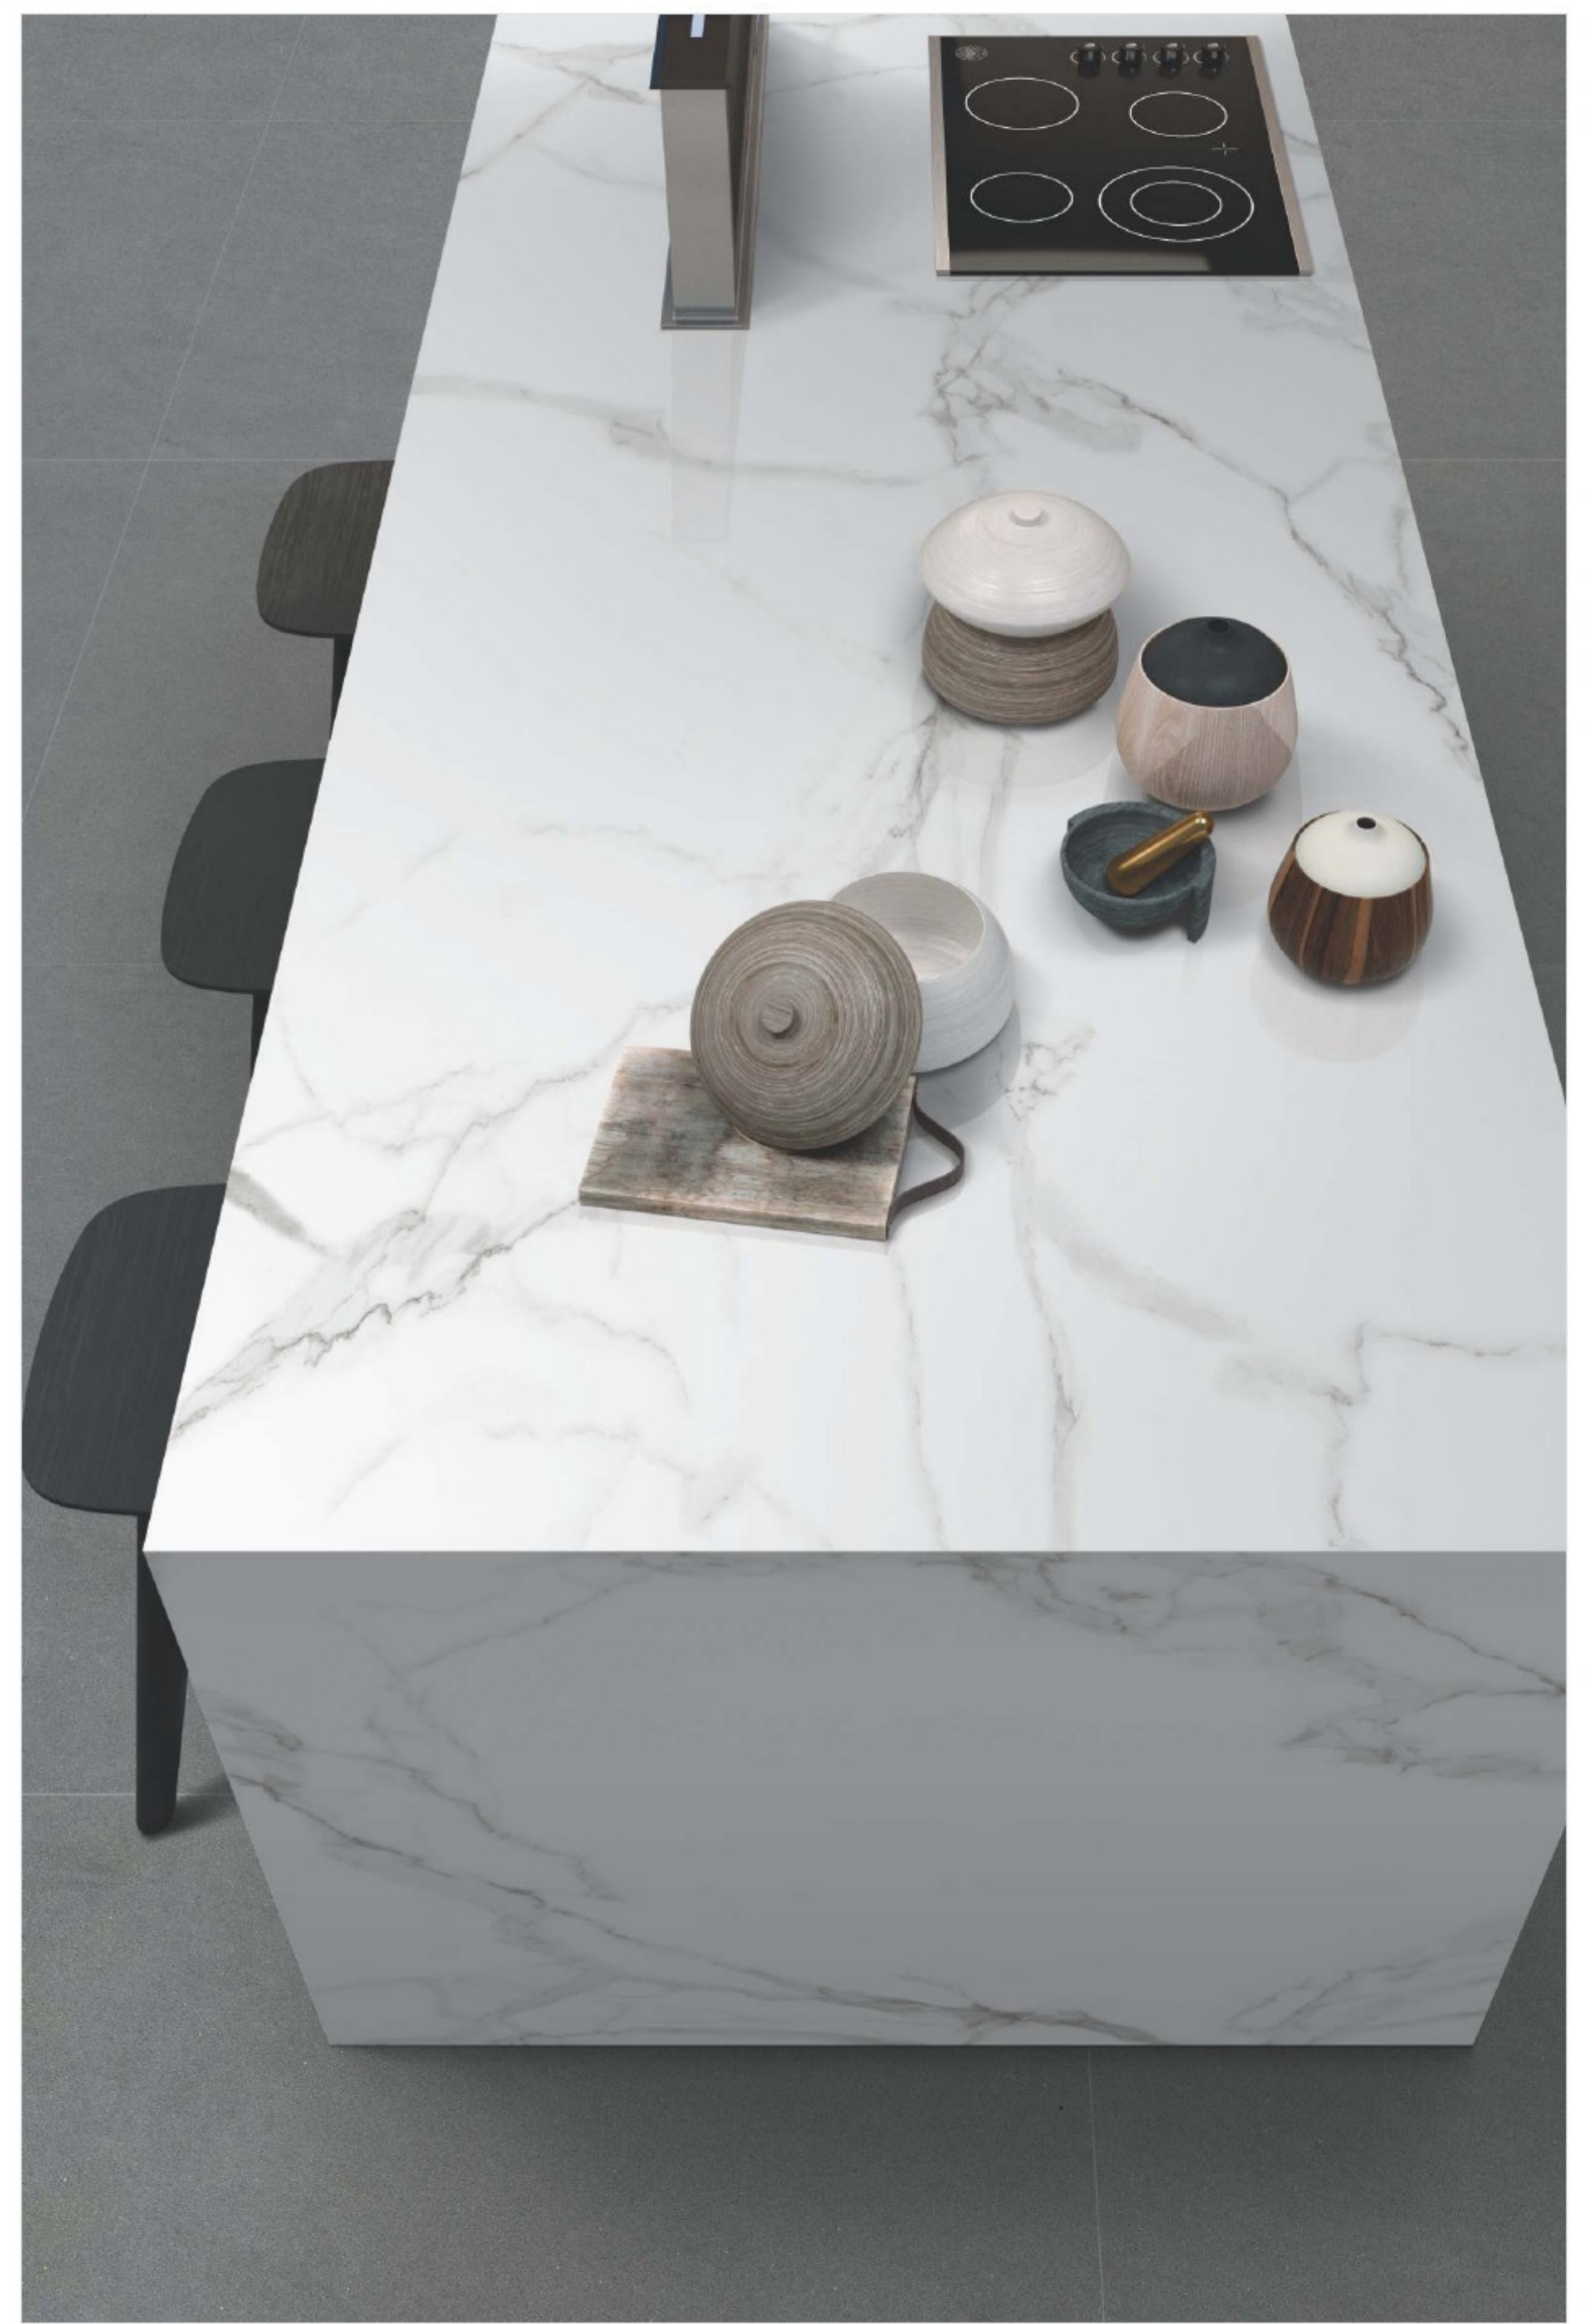



TABLE TOP : STATUARIO BELGIA | FLOOR : SENTILLA GRIS

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness



- 
Versatile solutions
- 
Easier to lay
- 
Resistant to chemical
- 
Resistant to loads
- 
Resistant to stains
- 
Wide range

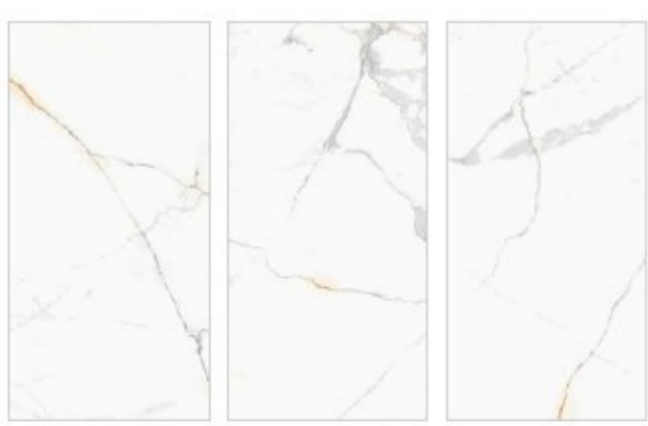



STATUARIO DOES 3 RANDOM

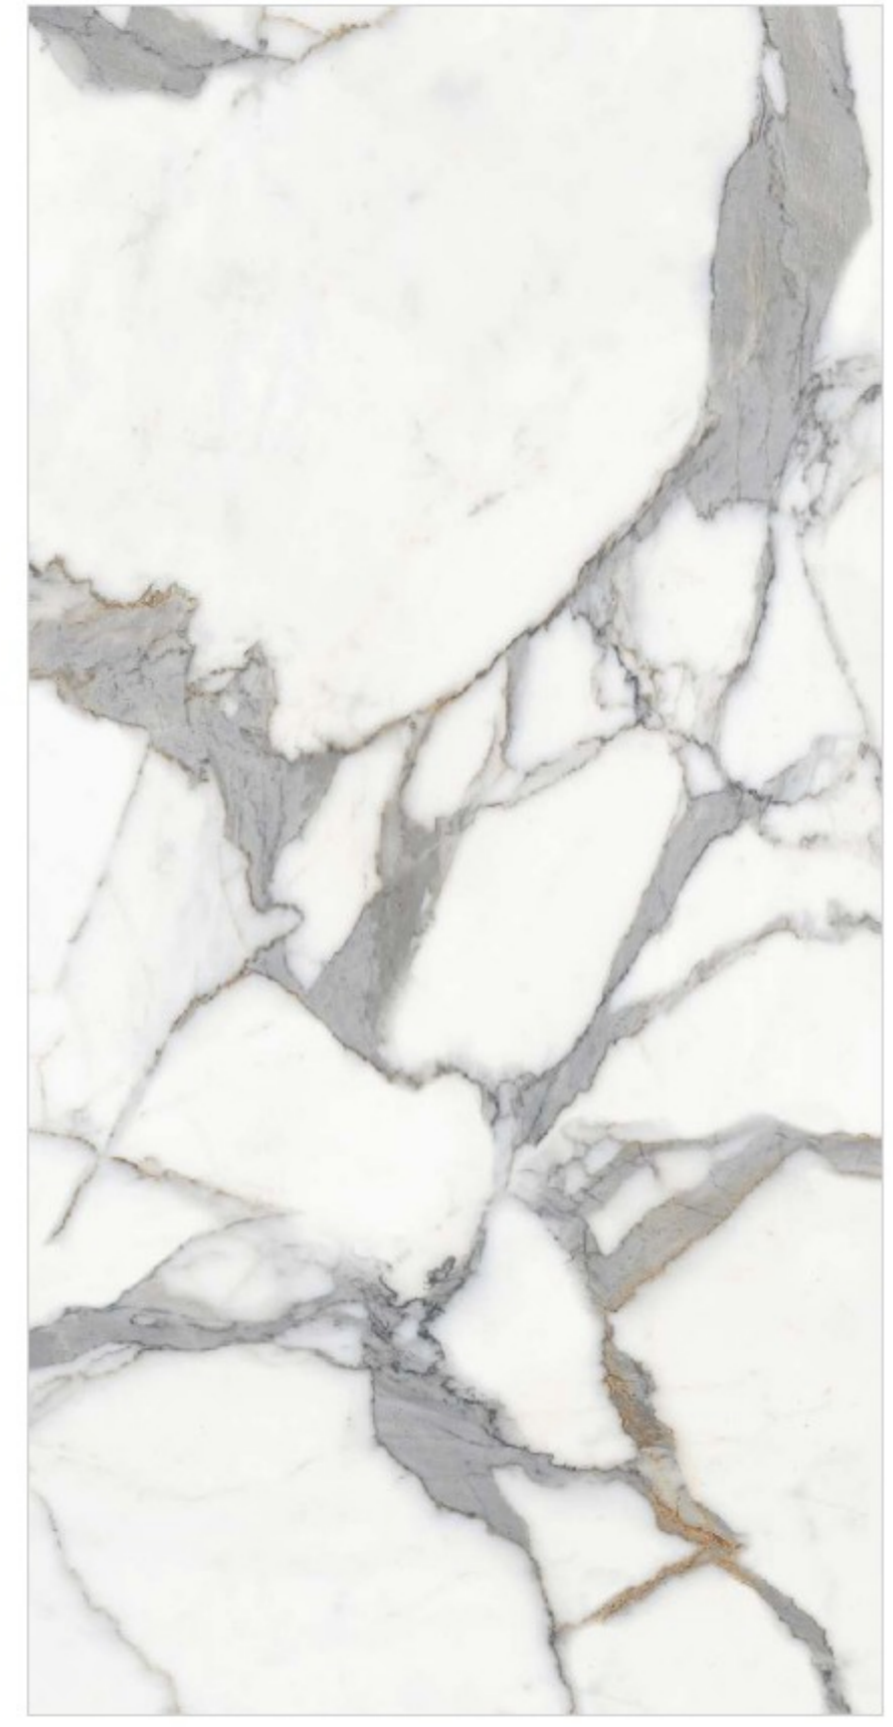

ANTIQUE SATVARIO 4 RANDOM

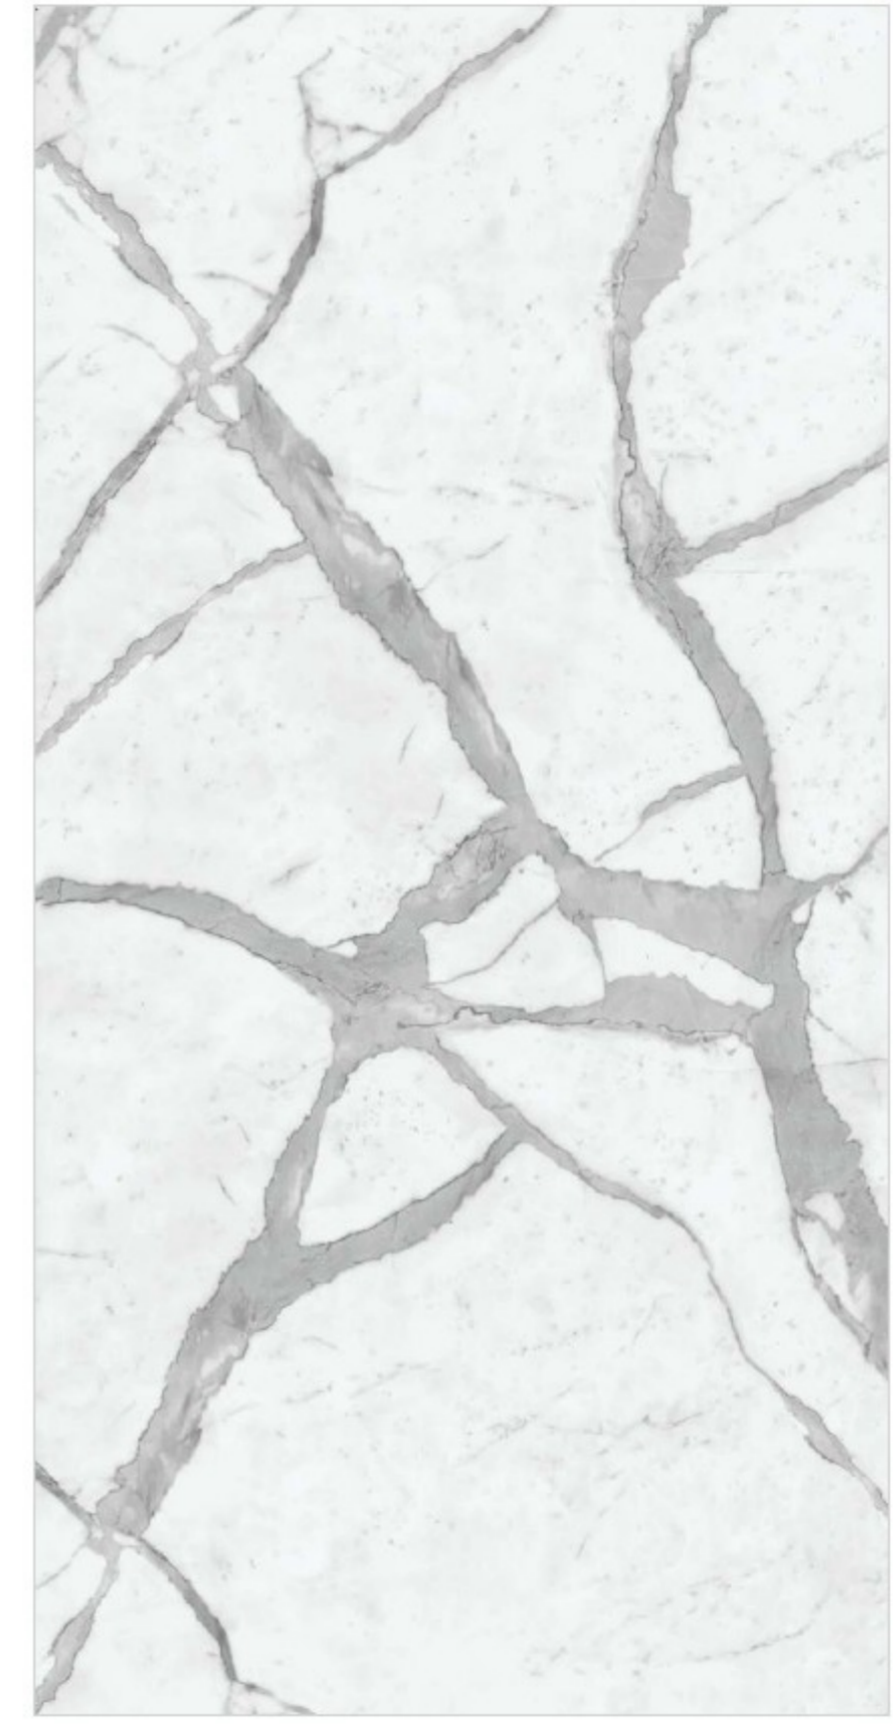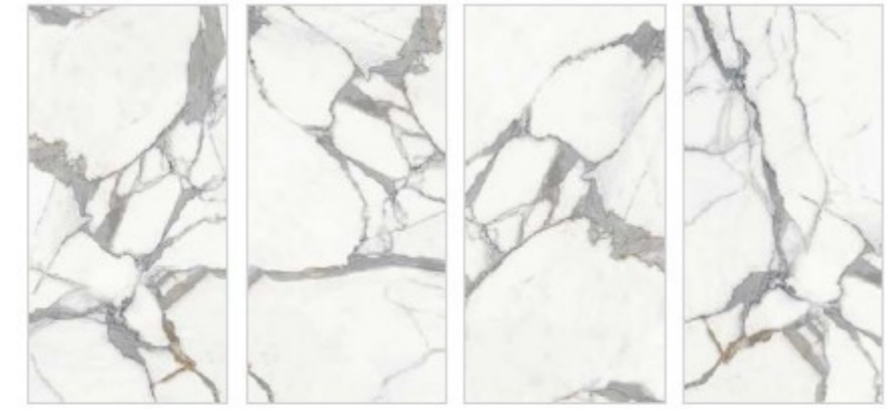

GALAXY STATUARIO (BOOK MATCH) BOOK MATCH A+B

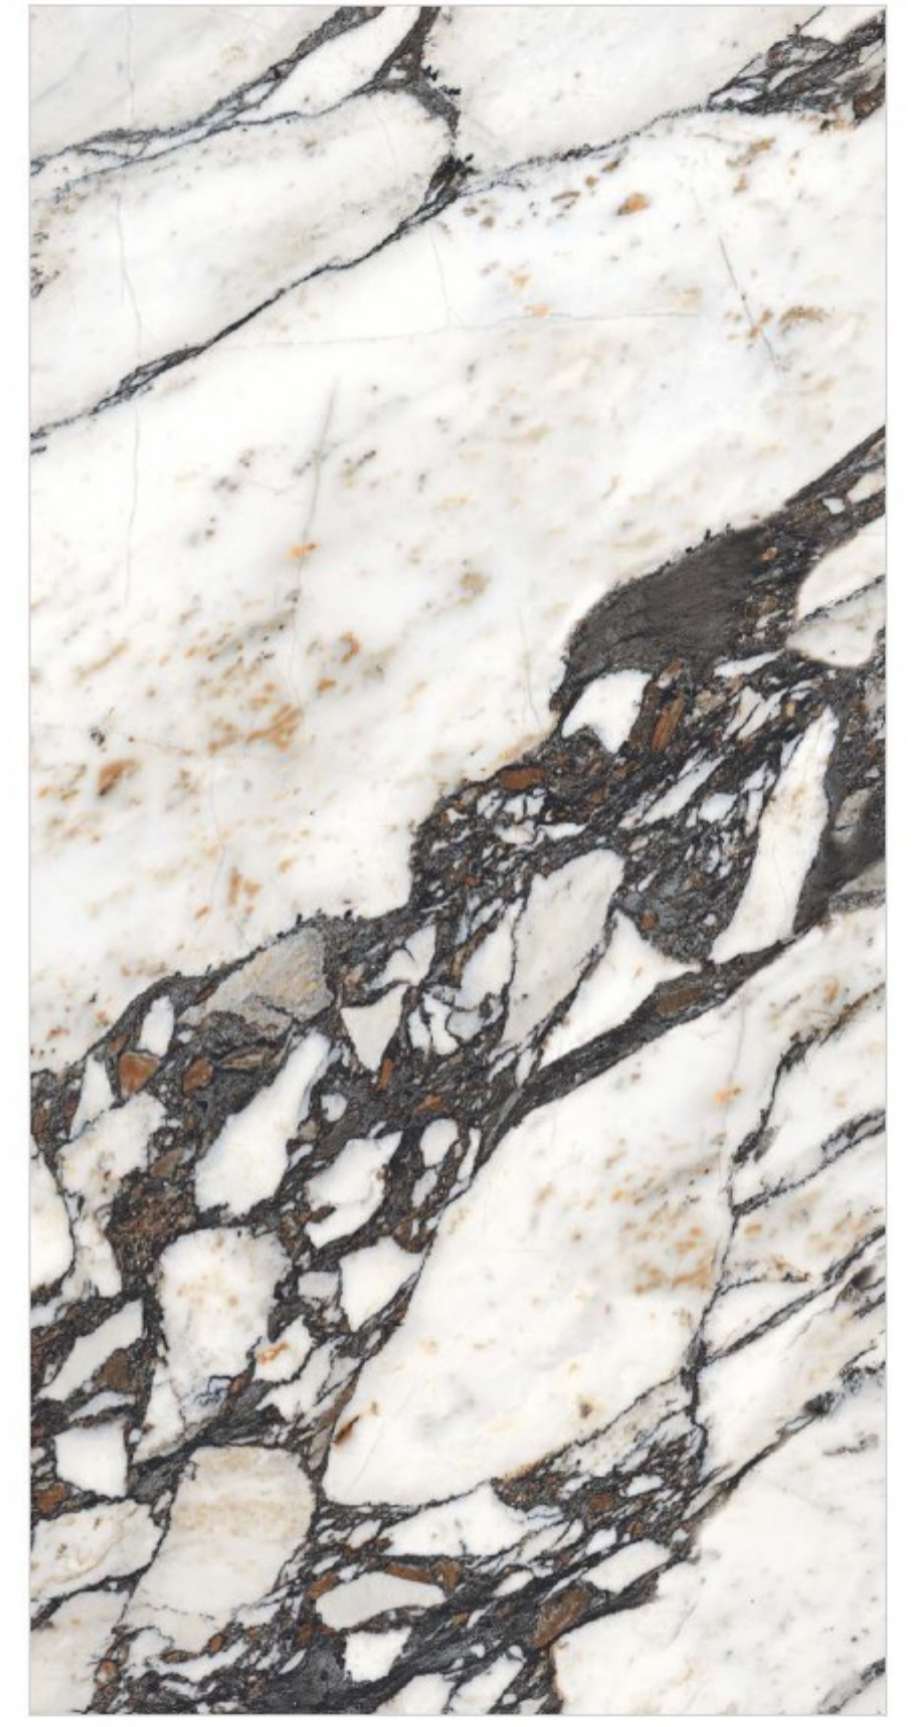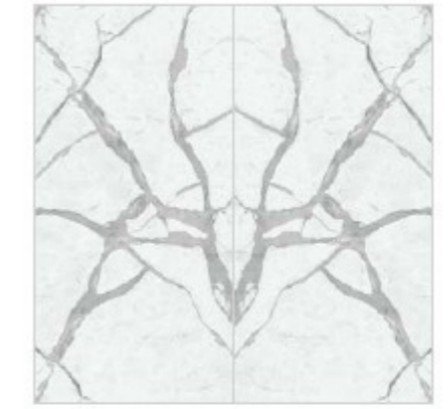

IMPACT SATVARIO (CONTINUE) 3 FACE CONTINUE







1200x
2400mm

HIGH GLOSSY FINISH 9mm thickness



Versatile solutions Easier to lay Resistant to chemical Resistant to loads Resistant to stains Wide range

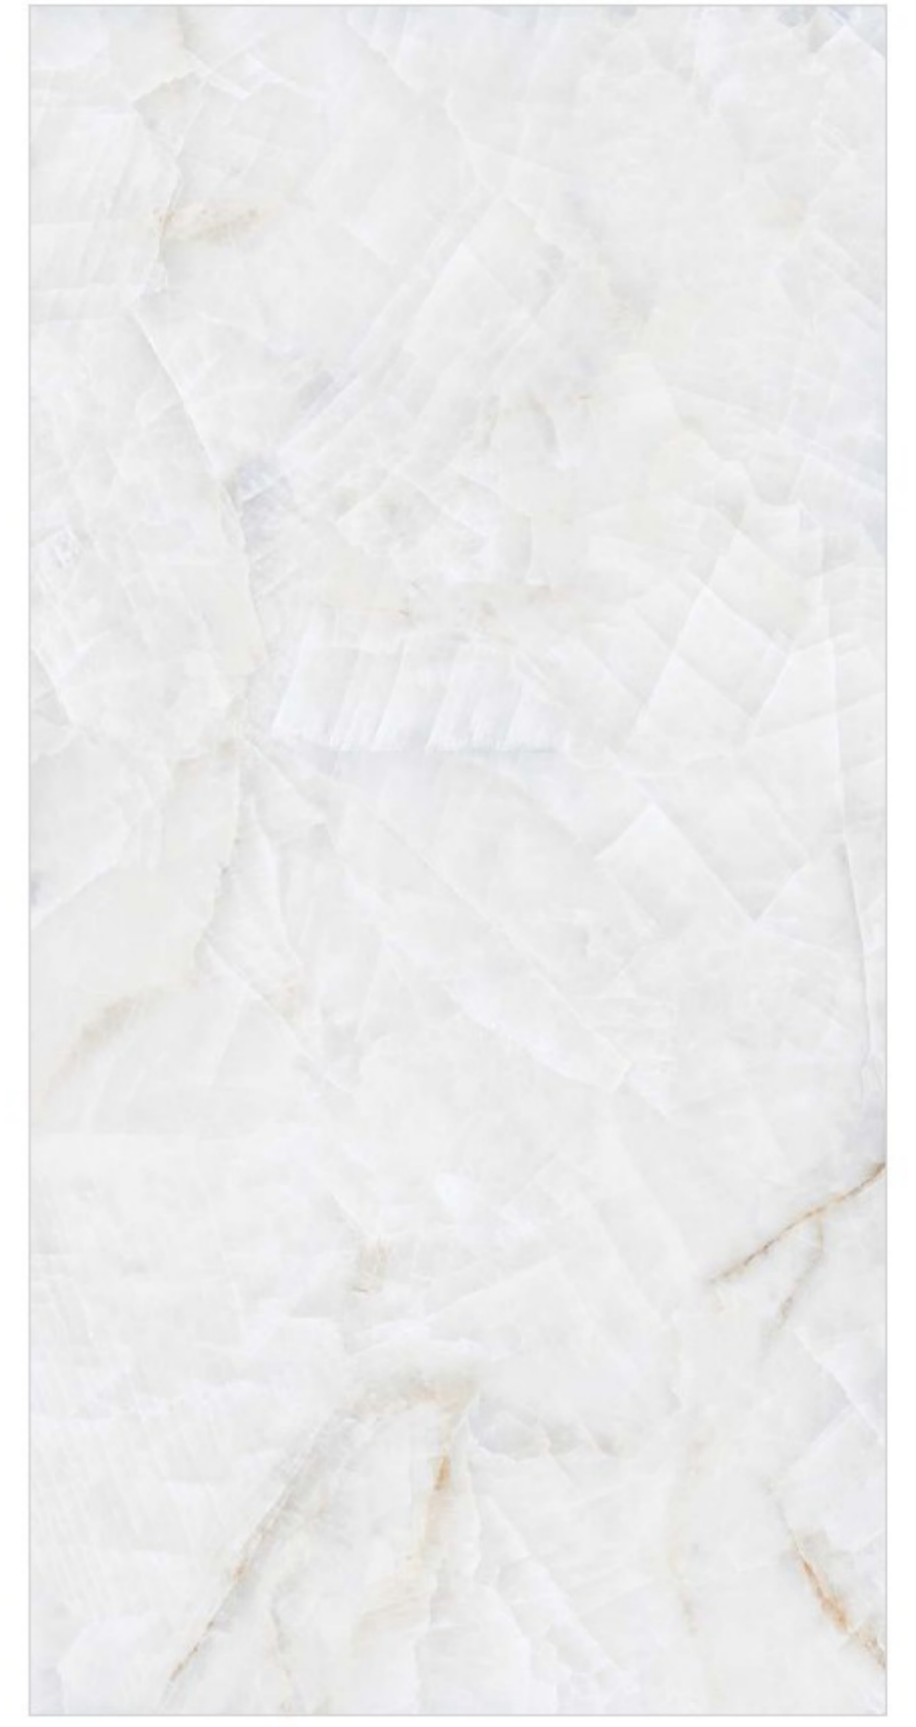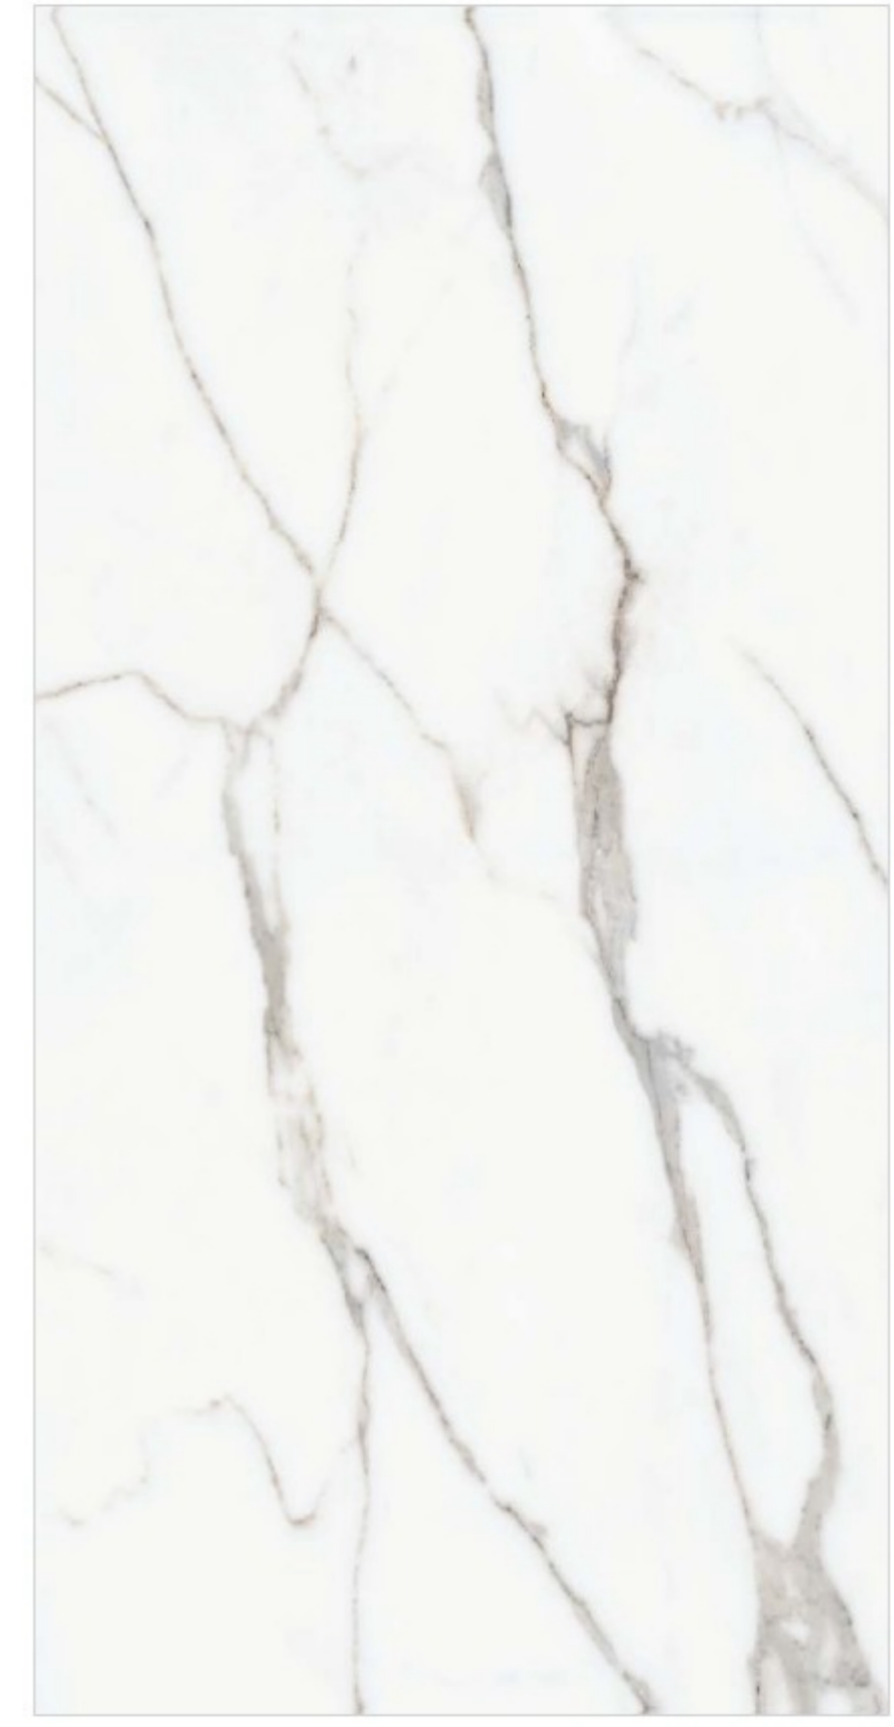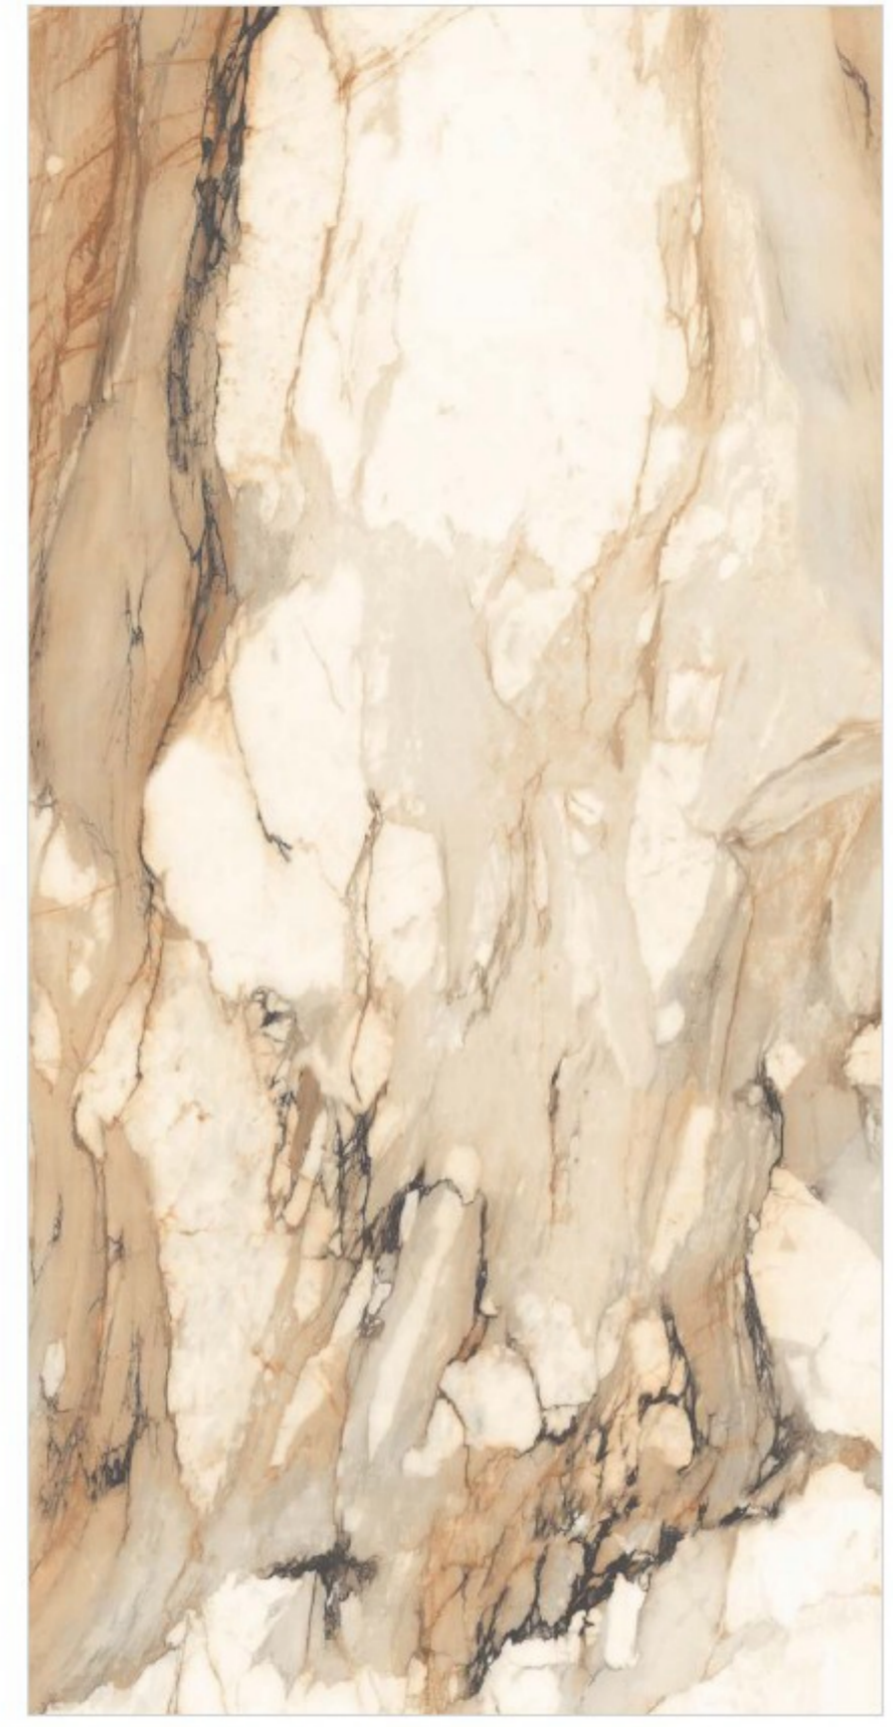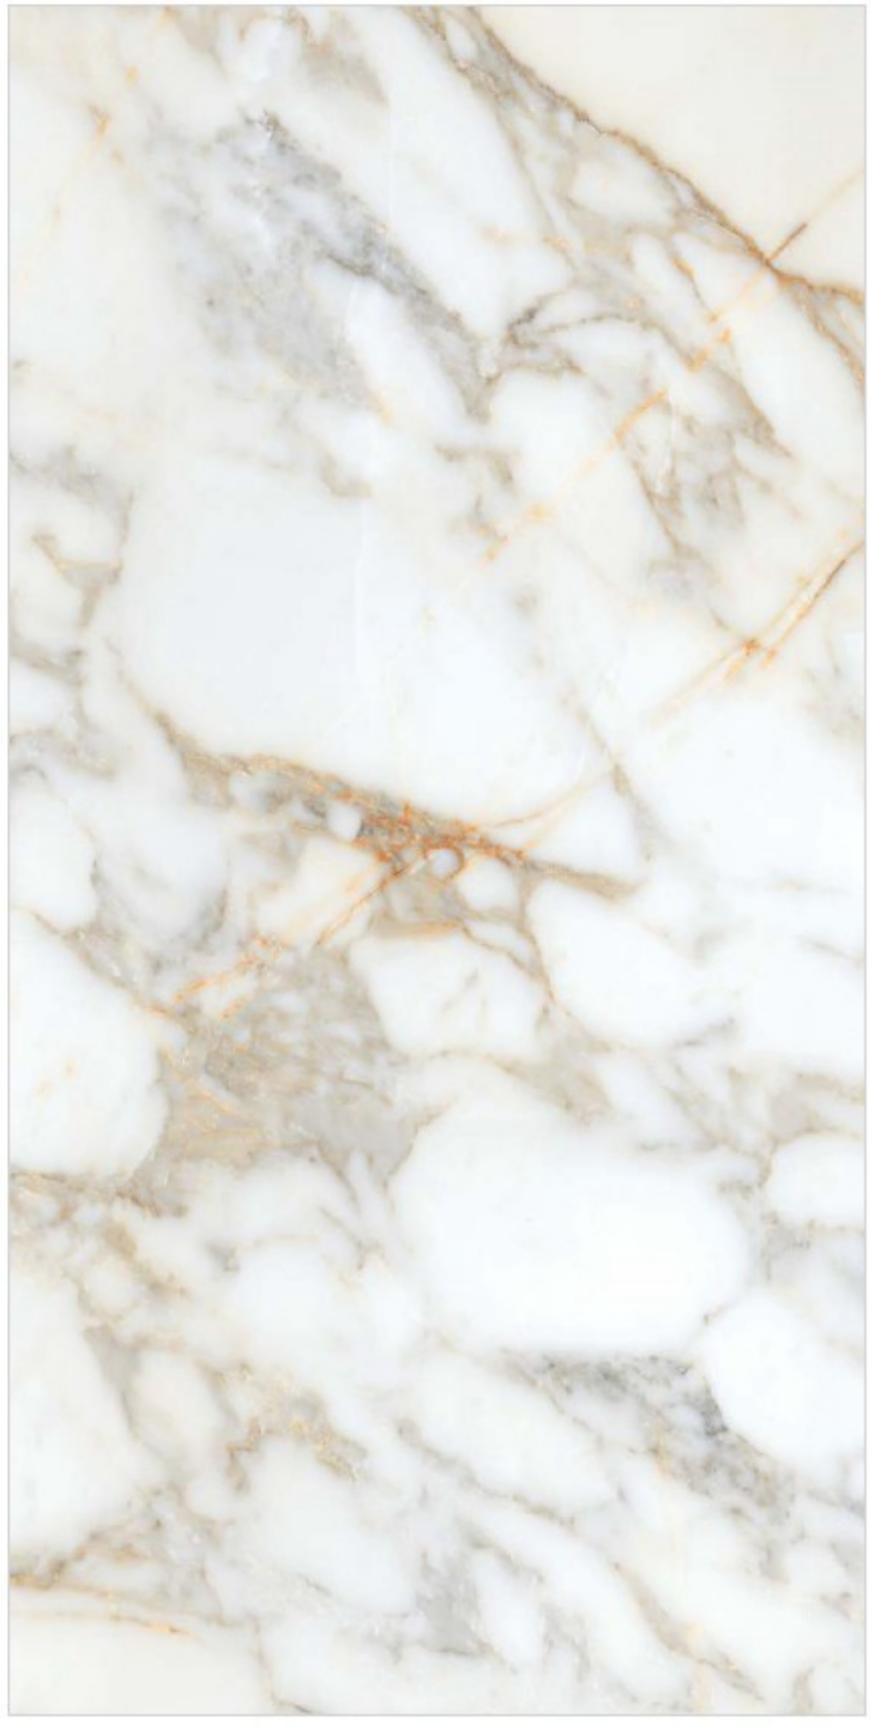


ALEX CALACATA 3 RANDOM

STATUARIO CALACATA 3 RANDOM

CALACATA LUCINA (CONTINUE) 2 FACE CONTINUE

ONYX SKY 3 RANDOM

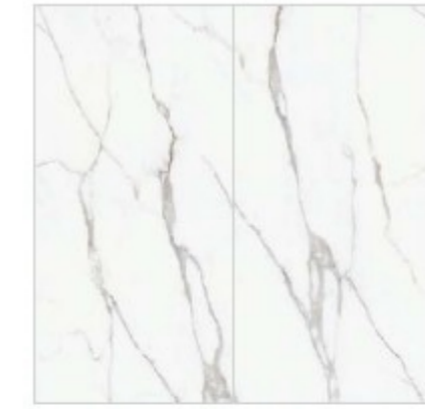



WALL : CALACATTA LUCINA (CONTIUNE)| FLOOR : CALACATTA LUCINA (CONTIUNE)

1200x
2400mm

HIGH GLOSSY FINISH

DECOR SERIES


9mm thickness



Versatile solutions
Easier to lay
Resistant to chemical
Resistant to loads
Resistant to stains
Wide range



M 1001 1 RANDOM

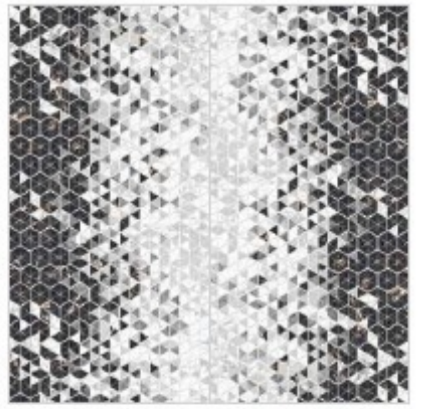

M 1002 1 RANDOM



M 1003 1 RANDOM





M 1004 1 RANDOM



1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

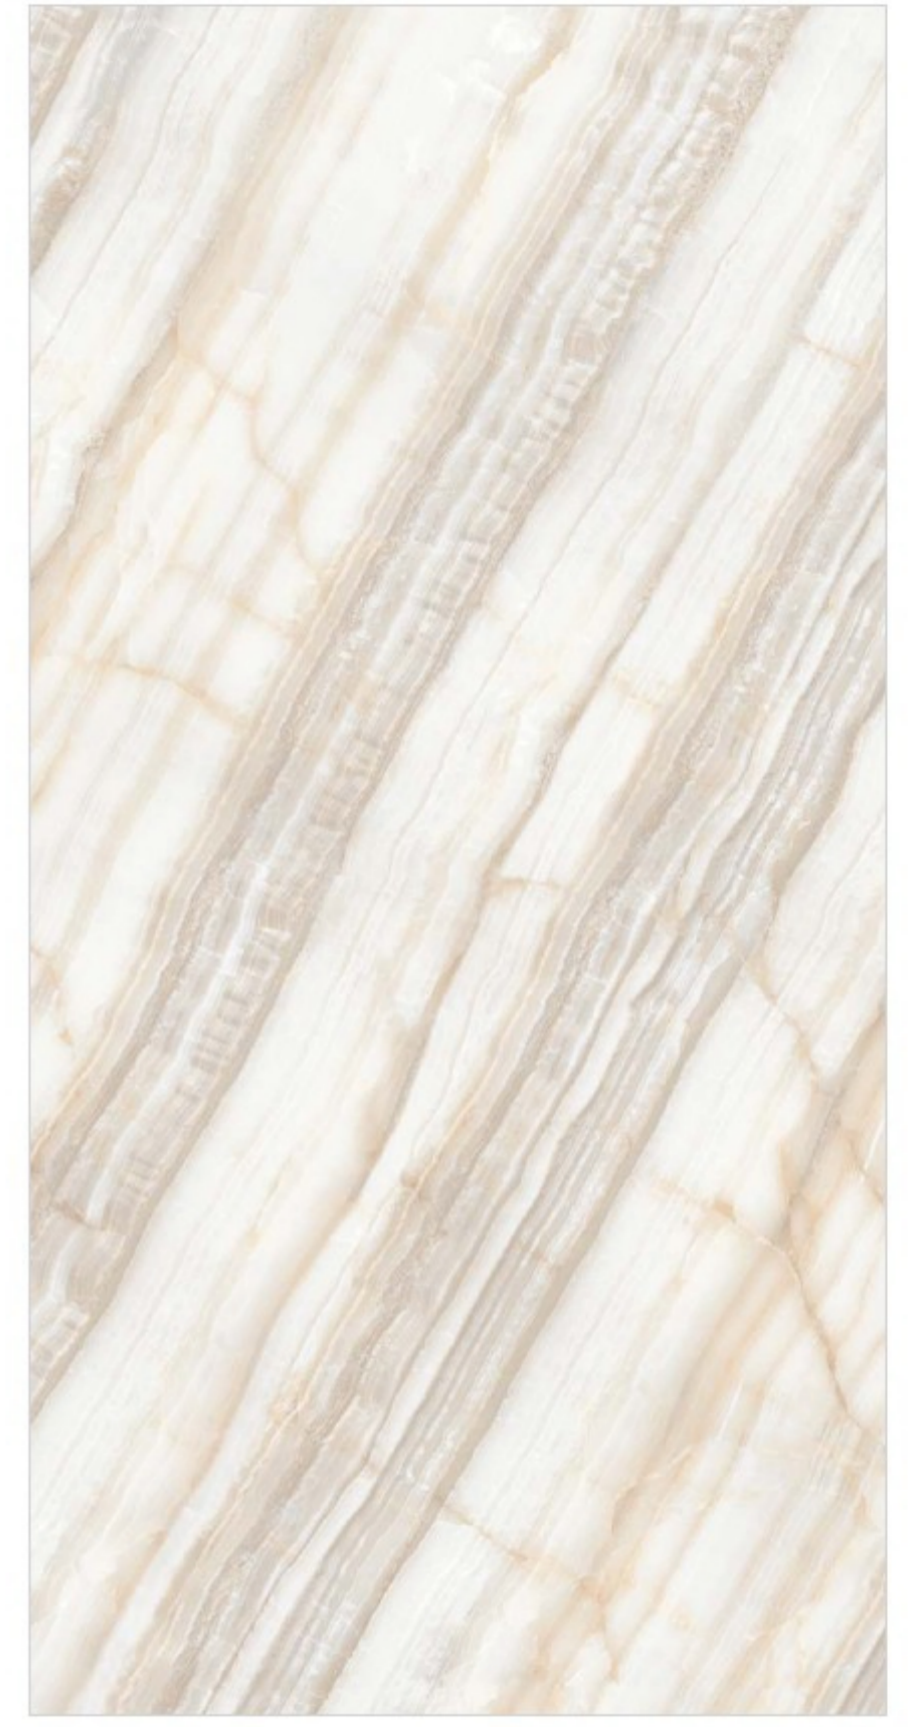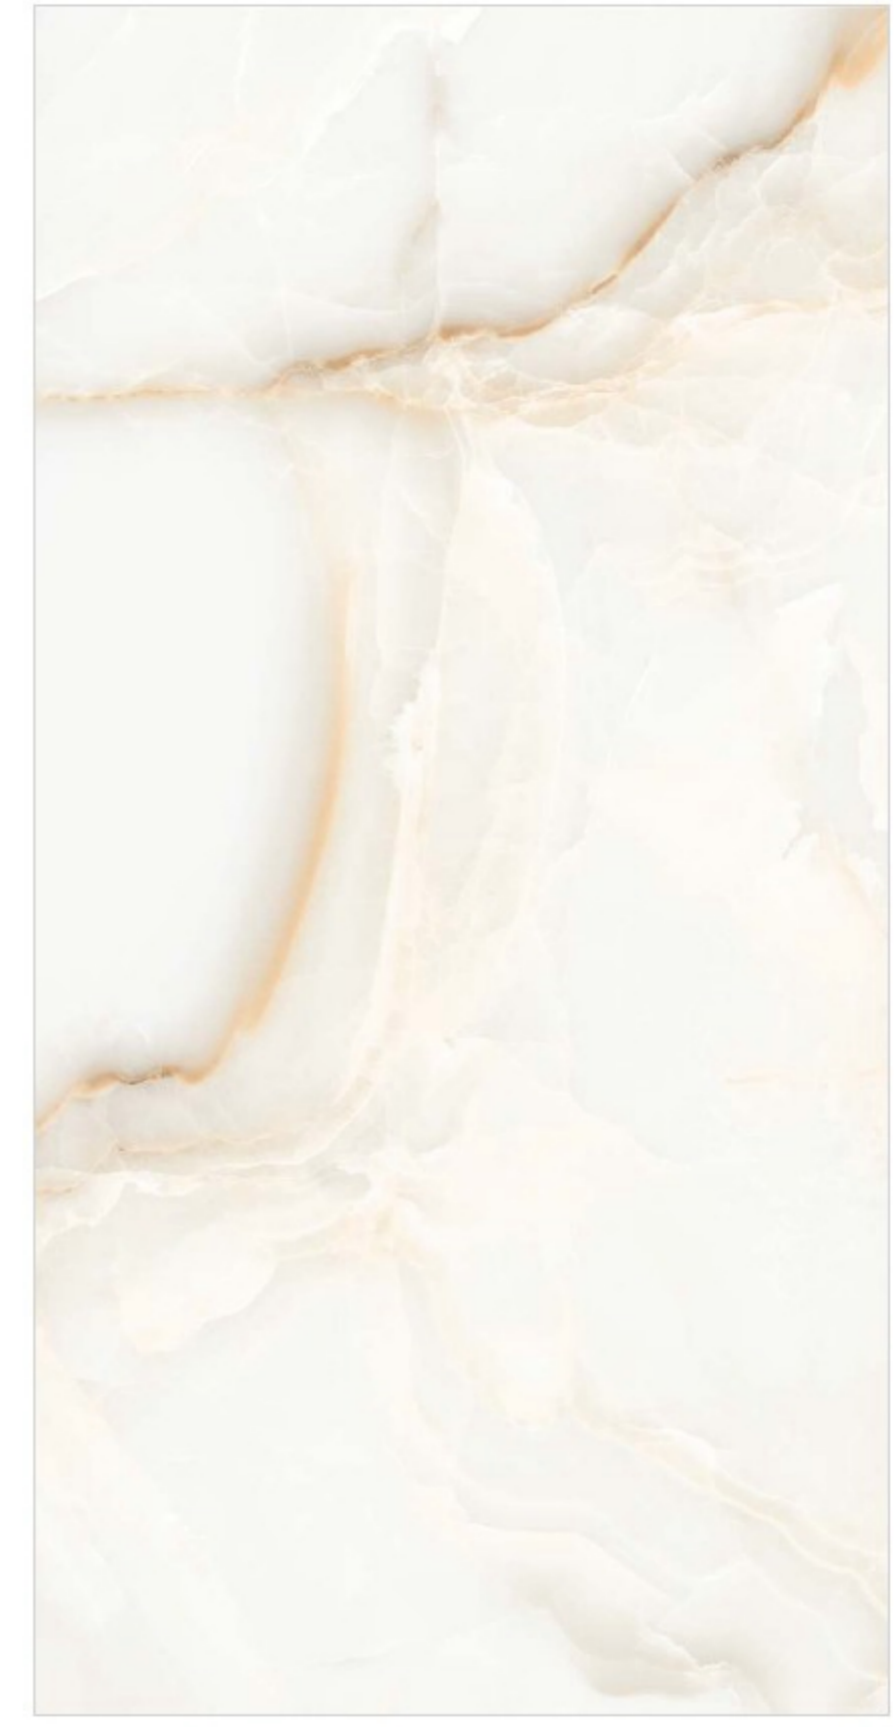


ZED ONYX ICE 4 RANDOM

ZED ONYX CLASSIC 4 RANDOM


ONYX LUXURY 3 RANDOM

CRISTALLO ONYX 2 RANDOM

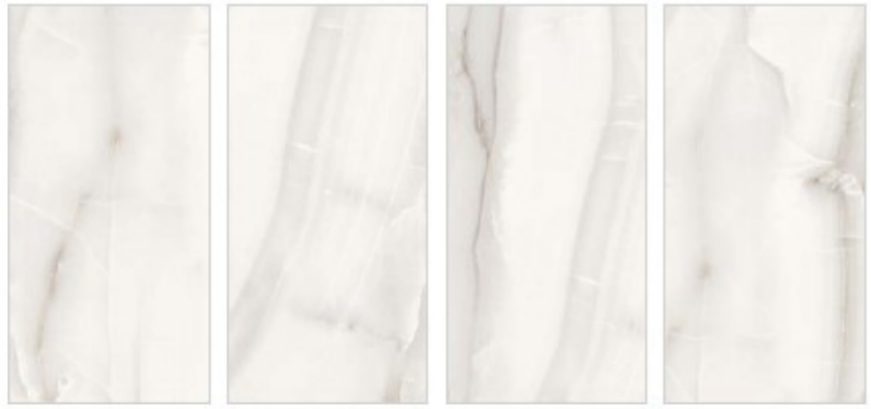


1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

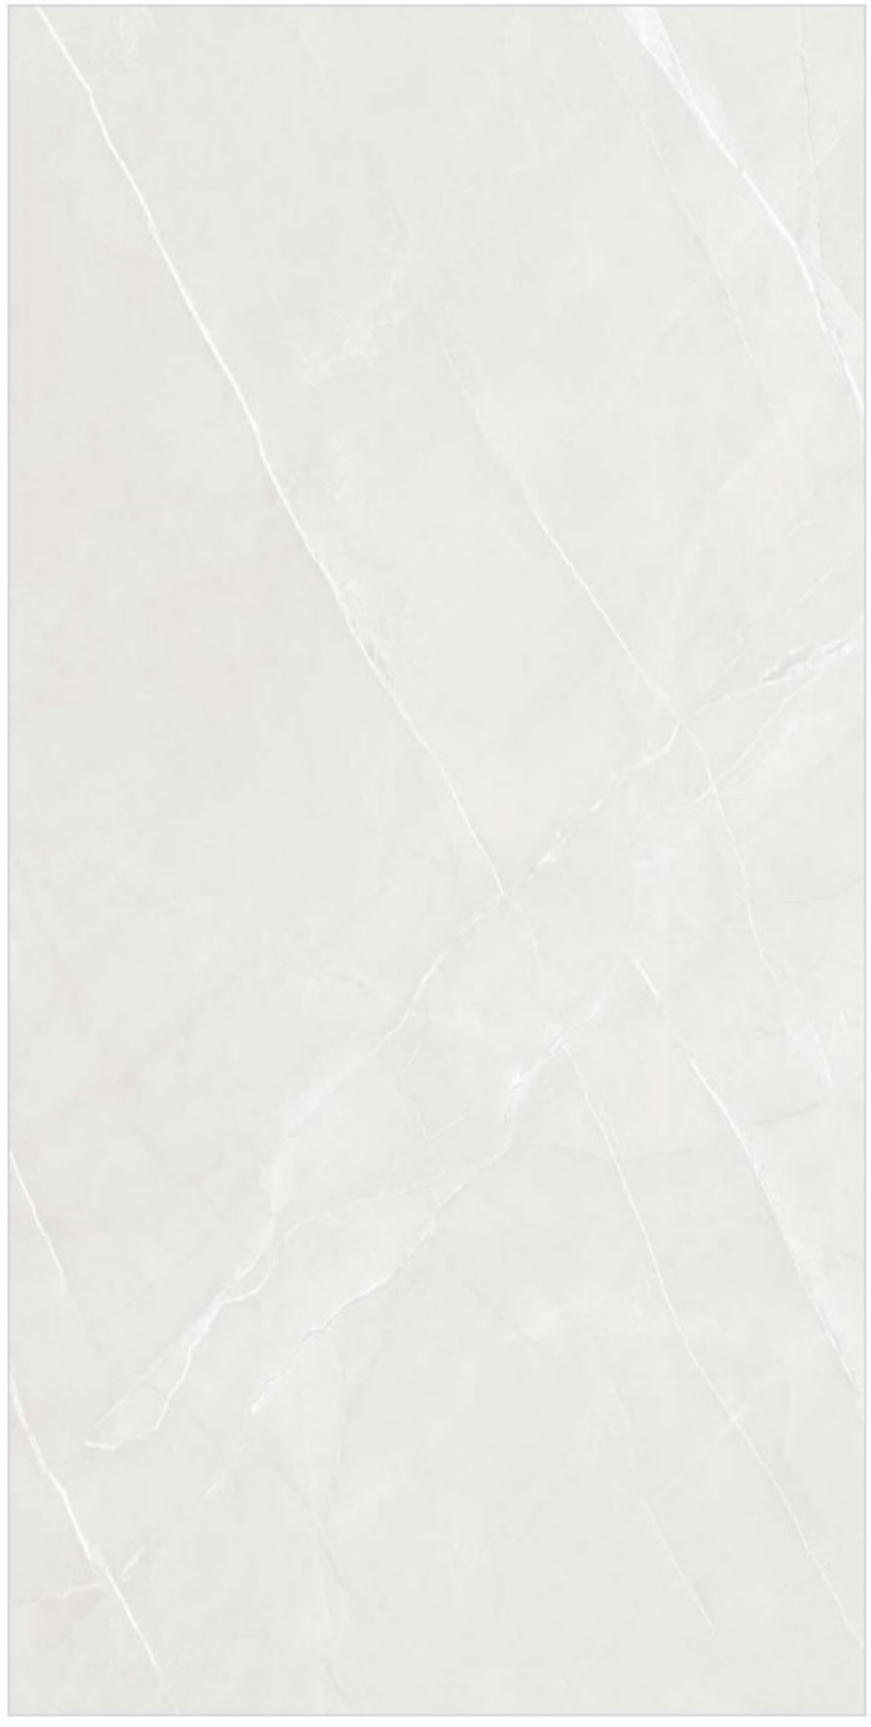

WILLIAM BIANCO 2 RANDOM

MONTANA GREY 2 RANDOM

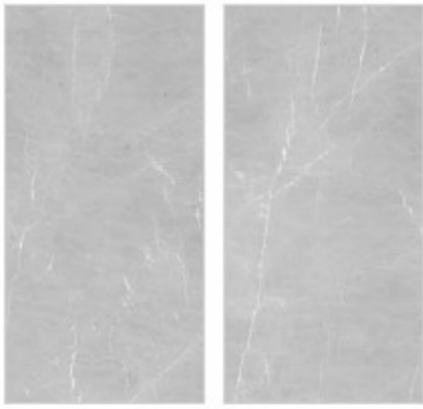


TURKE LANA 1 RANDOM



*



CRISTAN STONE 2 RANDOM

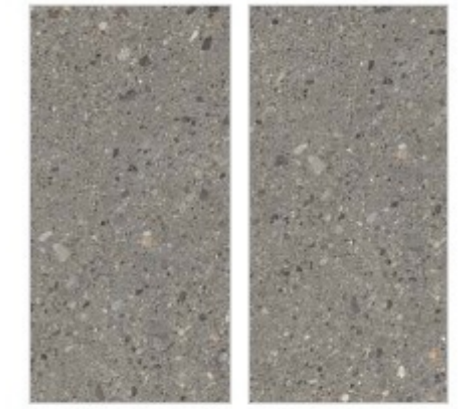

*Dark High Glossy Series

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range




SONATA WHITE 3 RANDOM

SONATA BRONZE 3 RANDOM

TITANIUM BROWN 3 RANDOM

TITANIUM NATURAL 3 RANDOM

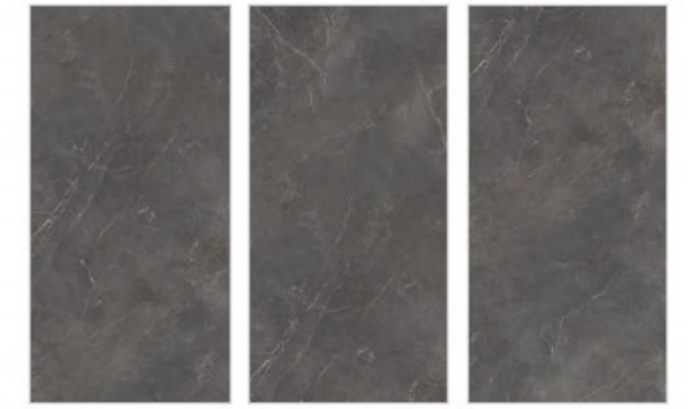

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness


-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

*




ARMANI BEIGE 2 RANDOM

ARMANI GOLD 2 RANDOM

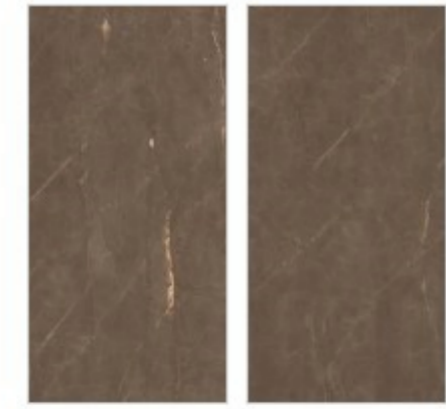



*Dark High Glossy Series

*

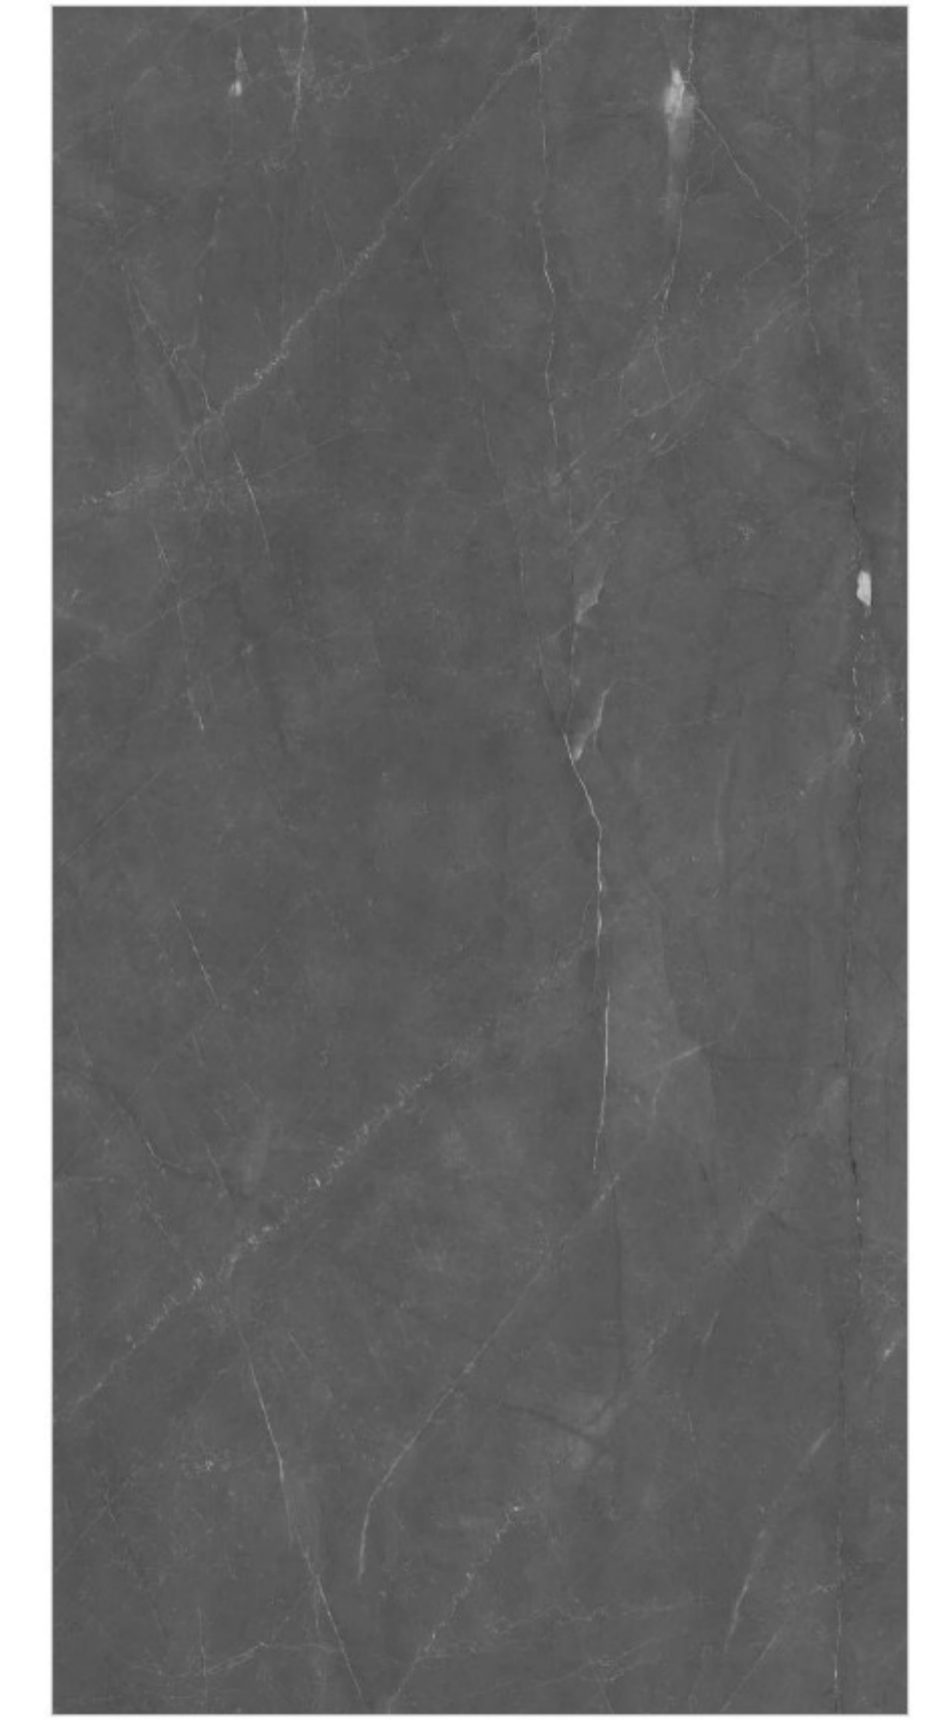

ARMANI GREY 2 RANDOM

ARMANI GRISS 2 RANDOM

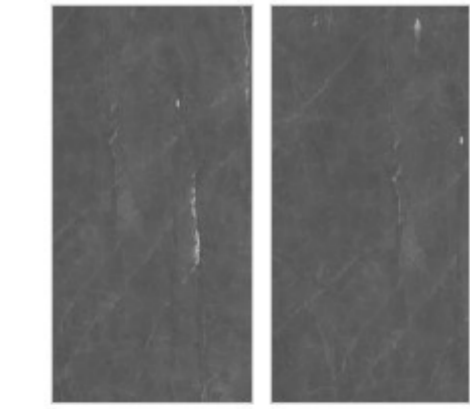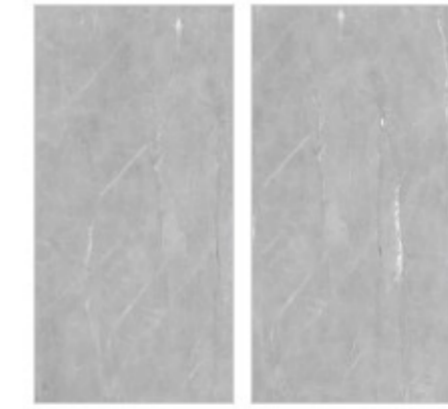

*Dark High Glossy Series



WALL : ARMANI BEIGE & ARMANI GOLD | FLOOR : ARMANI BEIGE

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness



VENUS CREMA 3 RANDOM

DYNA SUPREME 2 RANDOM



FLOOR : DYNA SUPREME

1200x
2400mm

HIGH GLOSSY FINISH  9mm thickness



Versatile solutions Easier to lay Resistant to chemical Resistant to loads Resistant to stains Wide range




BROCKEN BRECCIA (BOOK MATCH) BOOK MATCH A+B

BRECCIA CLASSIC 2 RANDOM

BRECCIA BEIGE 3 RANDOM

BRECCIA LAVA 2 RANDOM

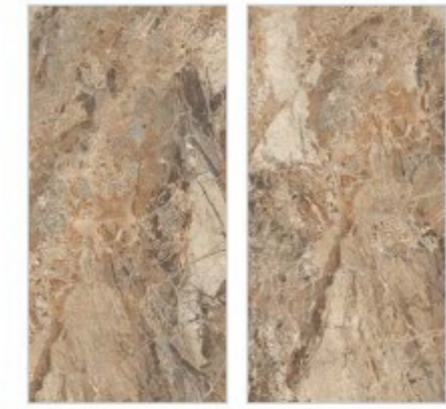



FLOOR : BRECCIA BEIGE

1200x
2400mm

HIGH GLOSSY FINISH 9mm thickness



Versatile solutions Easier to lay Resistant to chemical Resistant to loads Resistant to stains Wide range

*



*




BRECCIA CAPRAIA 4 RANDOM

BRECCIA CAPRAIA (BOOK MATCH) BOOK MATCH A+B



*Dark High Glossy Series

*

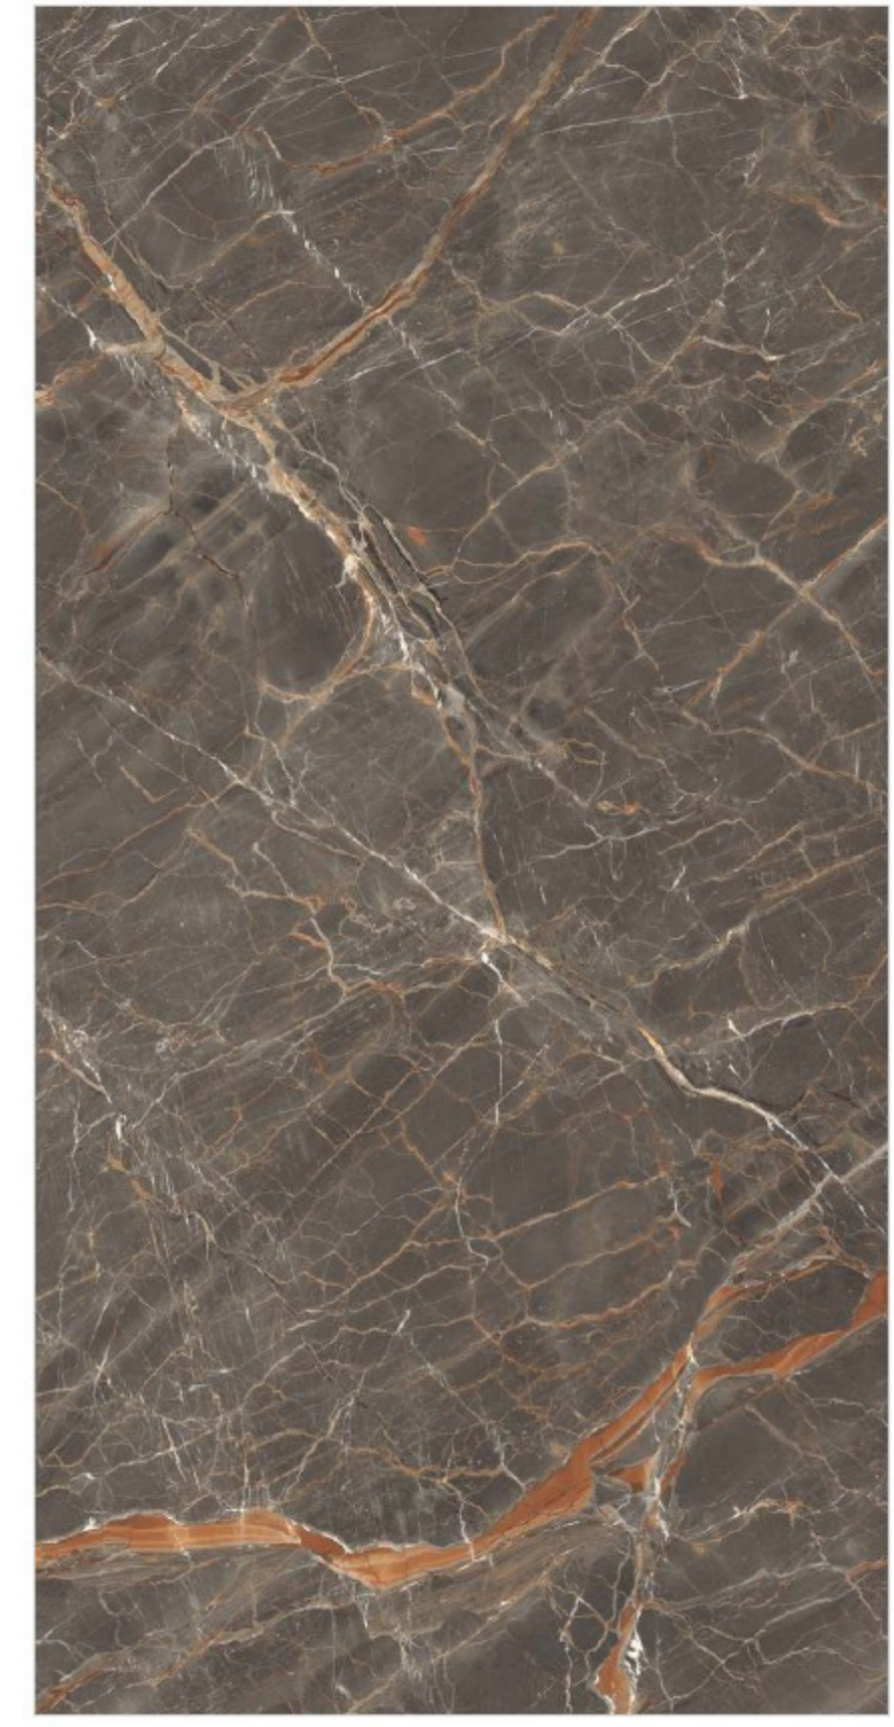


*



FOREST BROWN 2 RANDOM

EMPERADOR REGAL 3 RANDOM

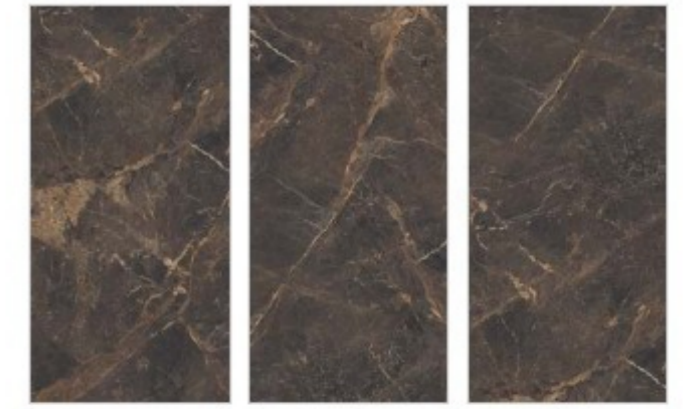


*Dark High Glossy Series

1200x
2400mm

HIGH GLOSSY FINISH 9mm thickness



Versatile solutions Easier to lay Resistant to chemical Resistant to loads Resistant to stains Wide range


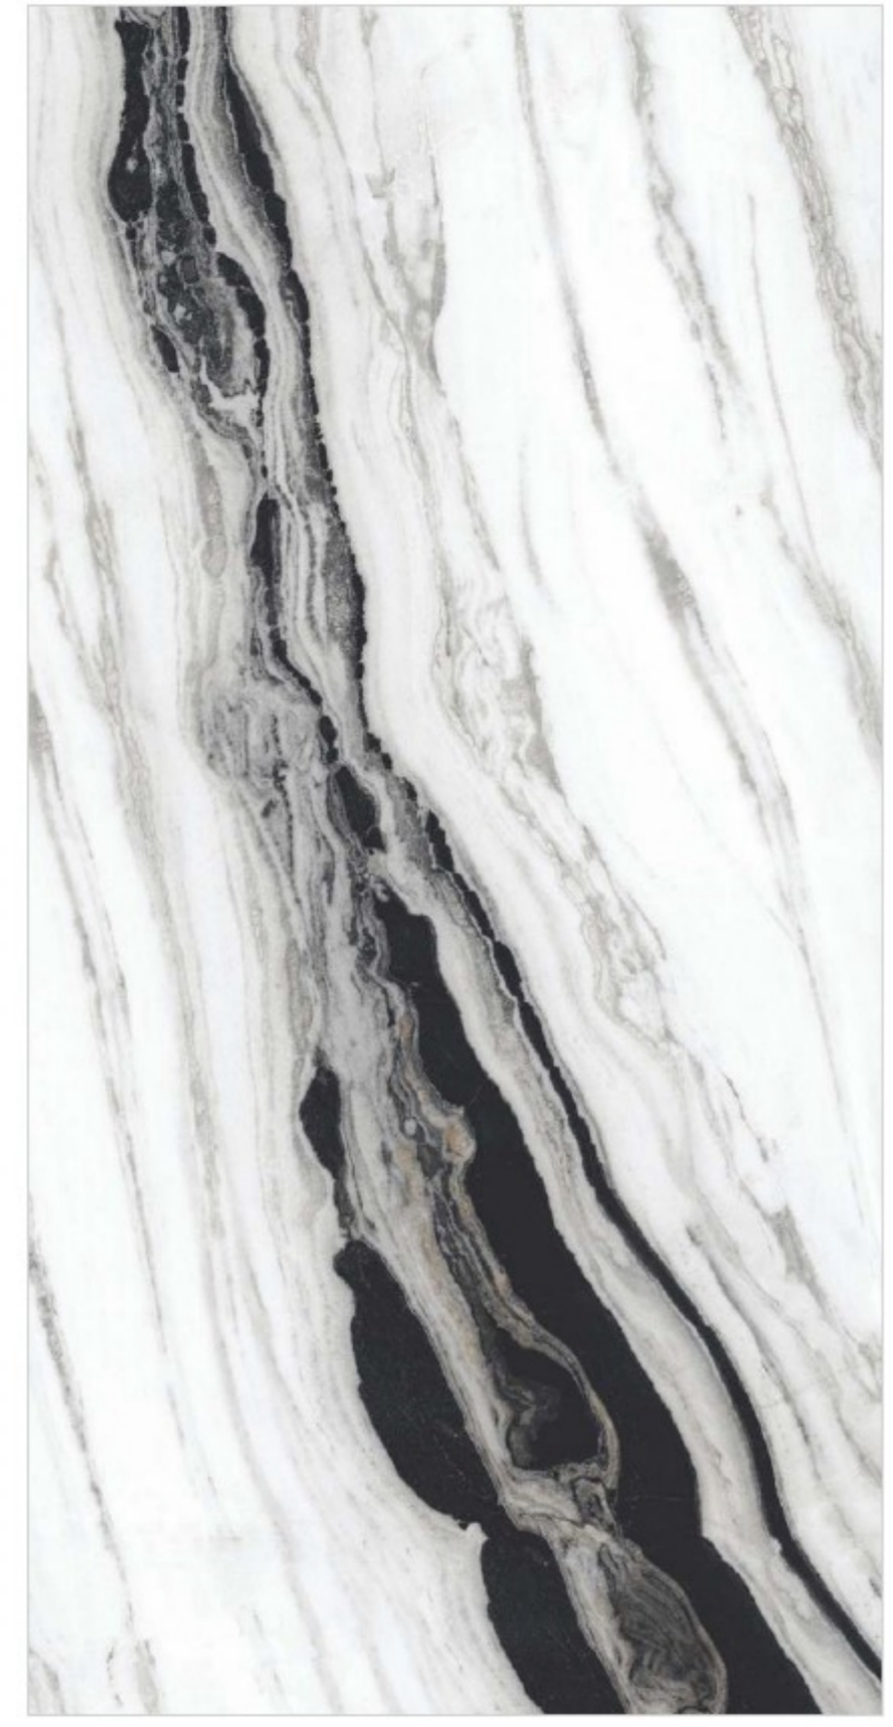


COVELANO LASA 2 RANDOM

COVELANO LASA (BOOK MATCH) BOOK MATCH A+B

ARENA DUNE 2 RANDOM

ARENA DUNE (BOOK MATCH) BOOK MATCH A+B

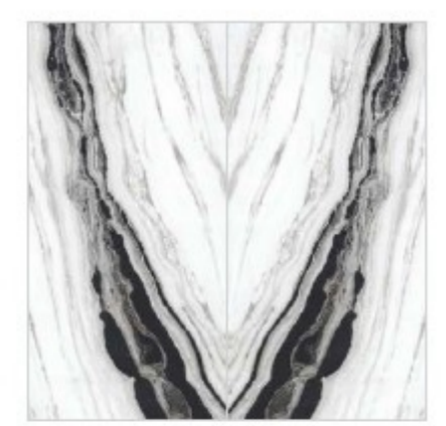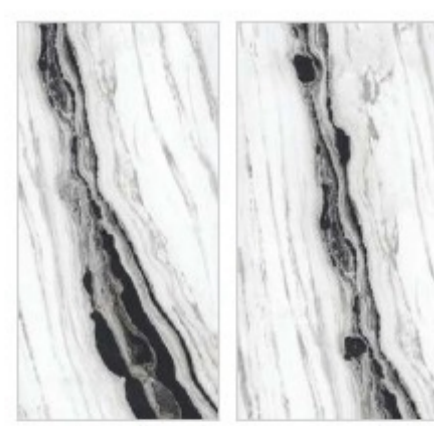

1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness


-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range



MARIYAN BROWN (BOOK MATCH) BOOK MATCH A+B



WONDER BEACH 2 RANDOM

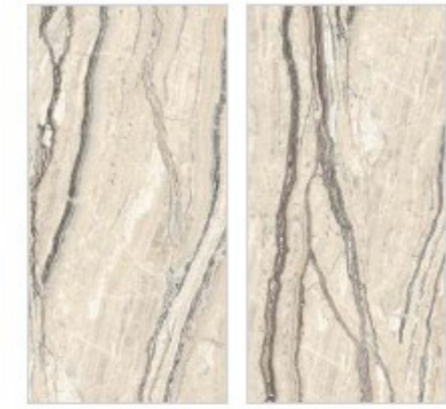

TRAVENTINO CREMA 2 RANDOM




TRAVENTINO BEIGE 1 RANDOM




1200x
2400mm **HIGH GLOSSY FINISH** 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range

*

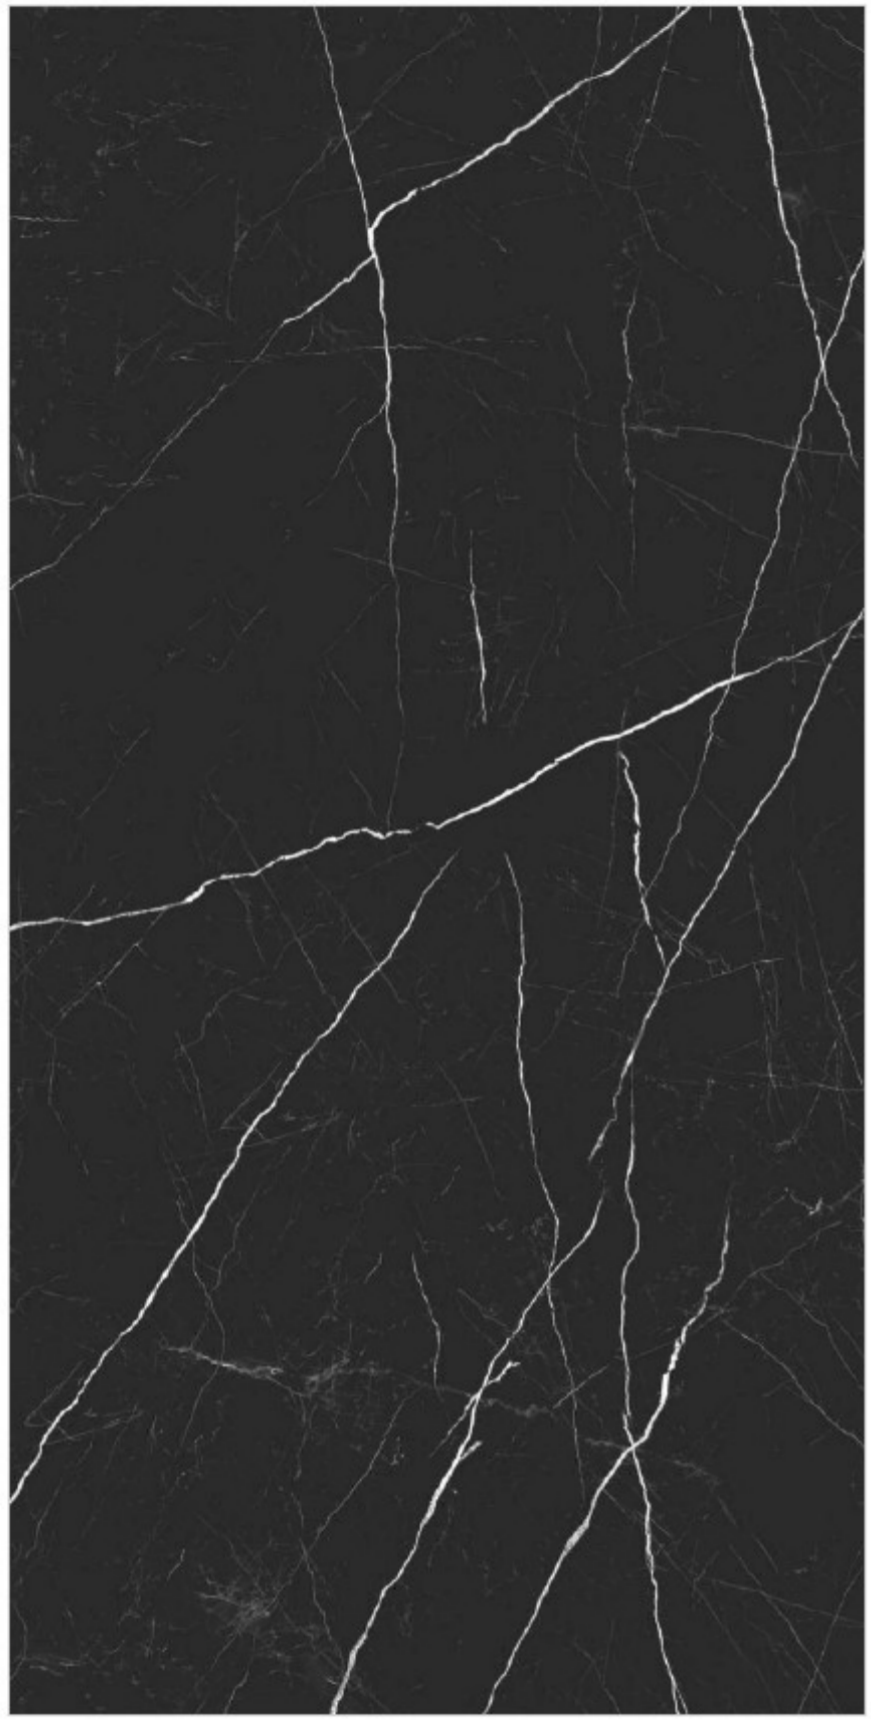

NERO MARQUINA 3 RANDOM

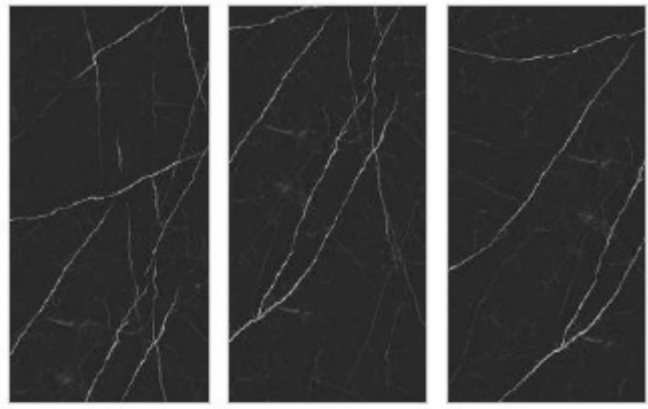


*




SAHARA BLACK 2 RANDOM




*

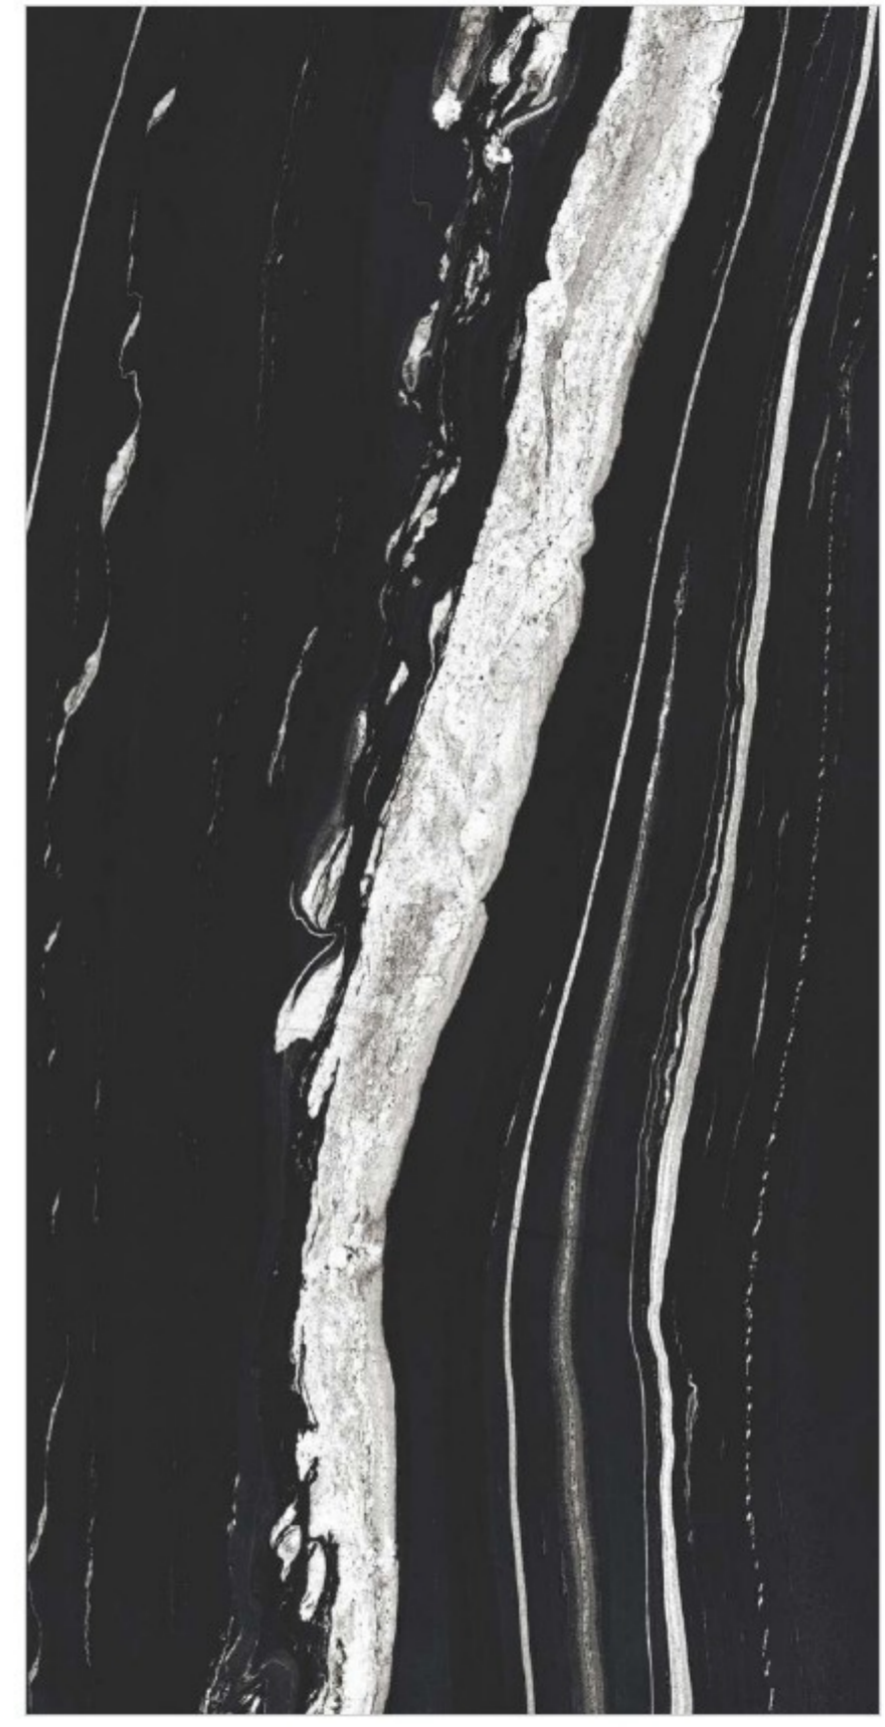


FUSION BLACK (BOOK MATCH) BOOK MATCH A+B

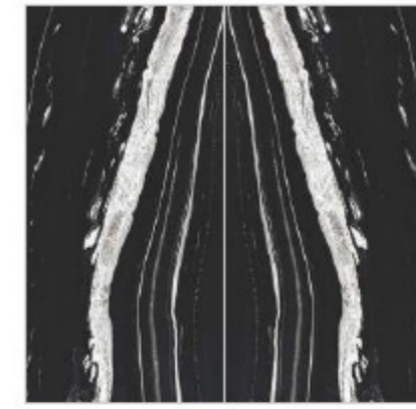

*

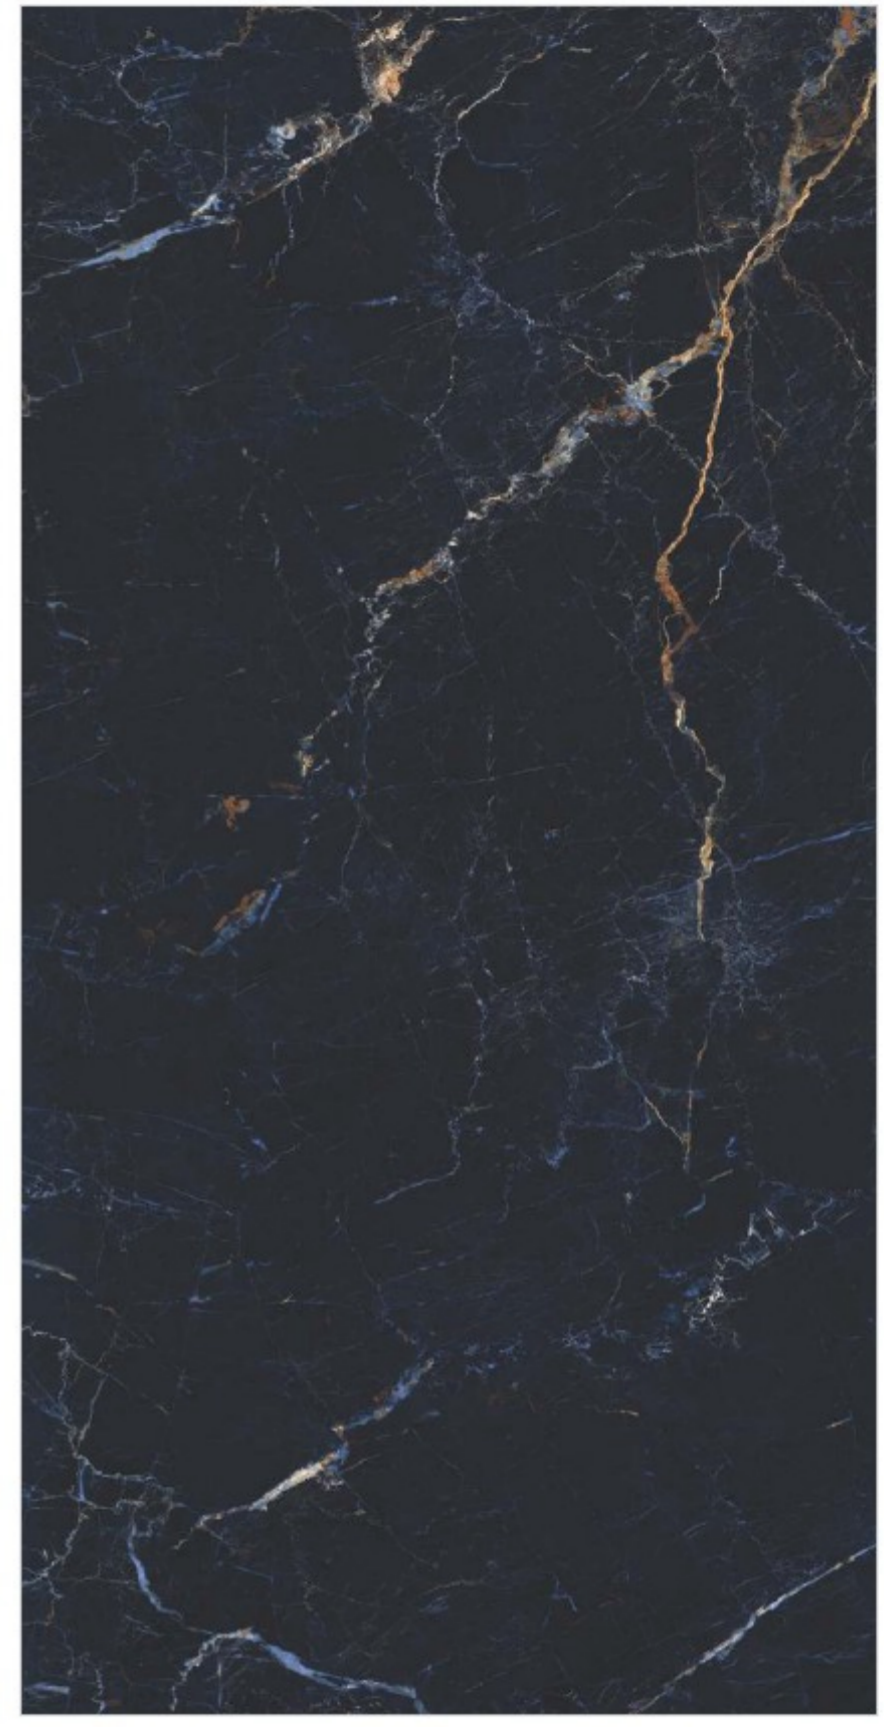

AZUL CIELO 3 RANDOM

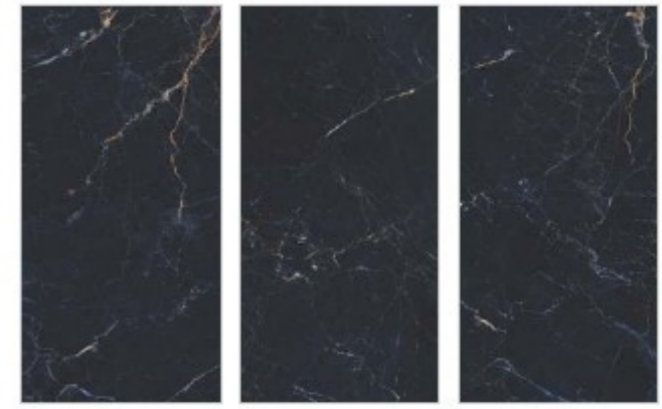

1200x
2400mm


HIGH GLOSSY FINISH

9mm thickness




TOBACCO

1 RANDOM

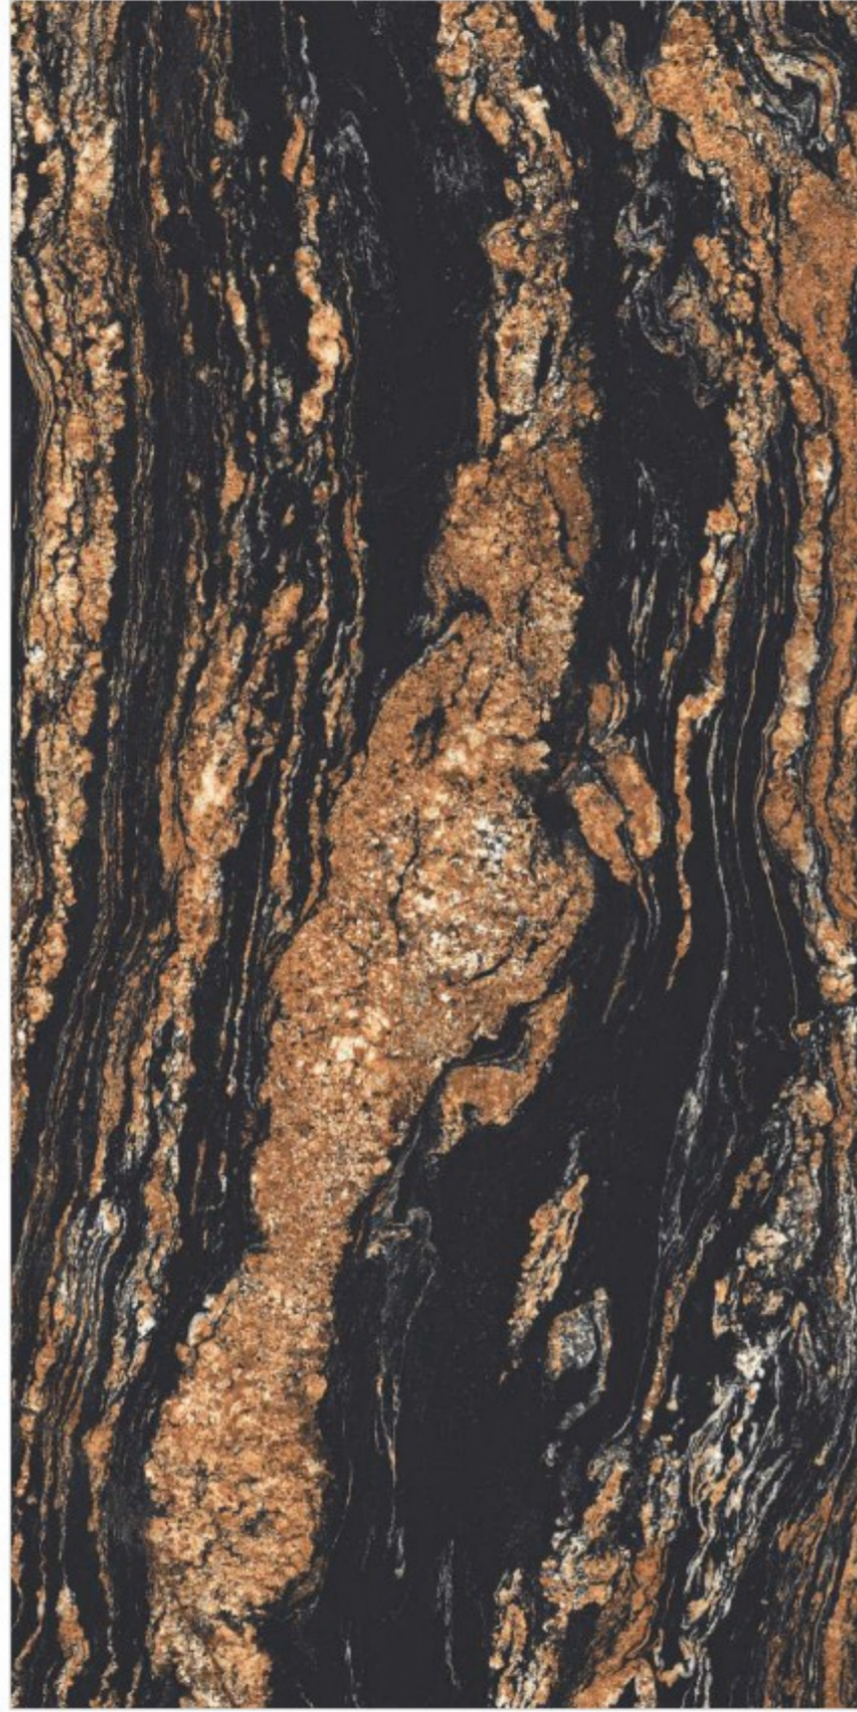

MAGMA BLACK

2 RANDOM

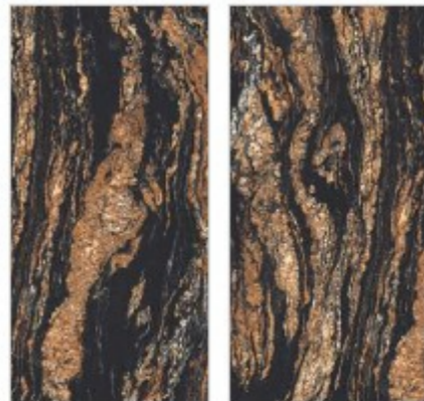


FLOOR : TOBACCO

1200x
2400mm


HIGH GLOSSY FINISH  9mm thickness





Versatile solutions
Easier to lay
Resistant to chemical
Resistant to loads
Resistant to stains
Wide range

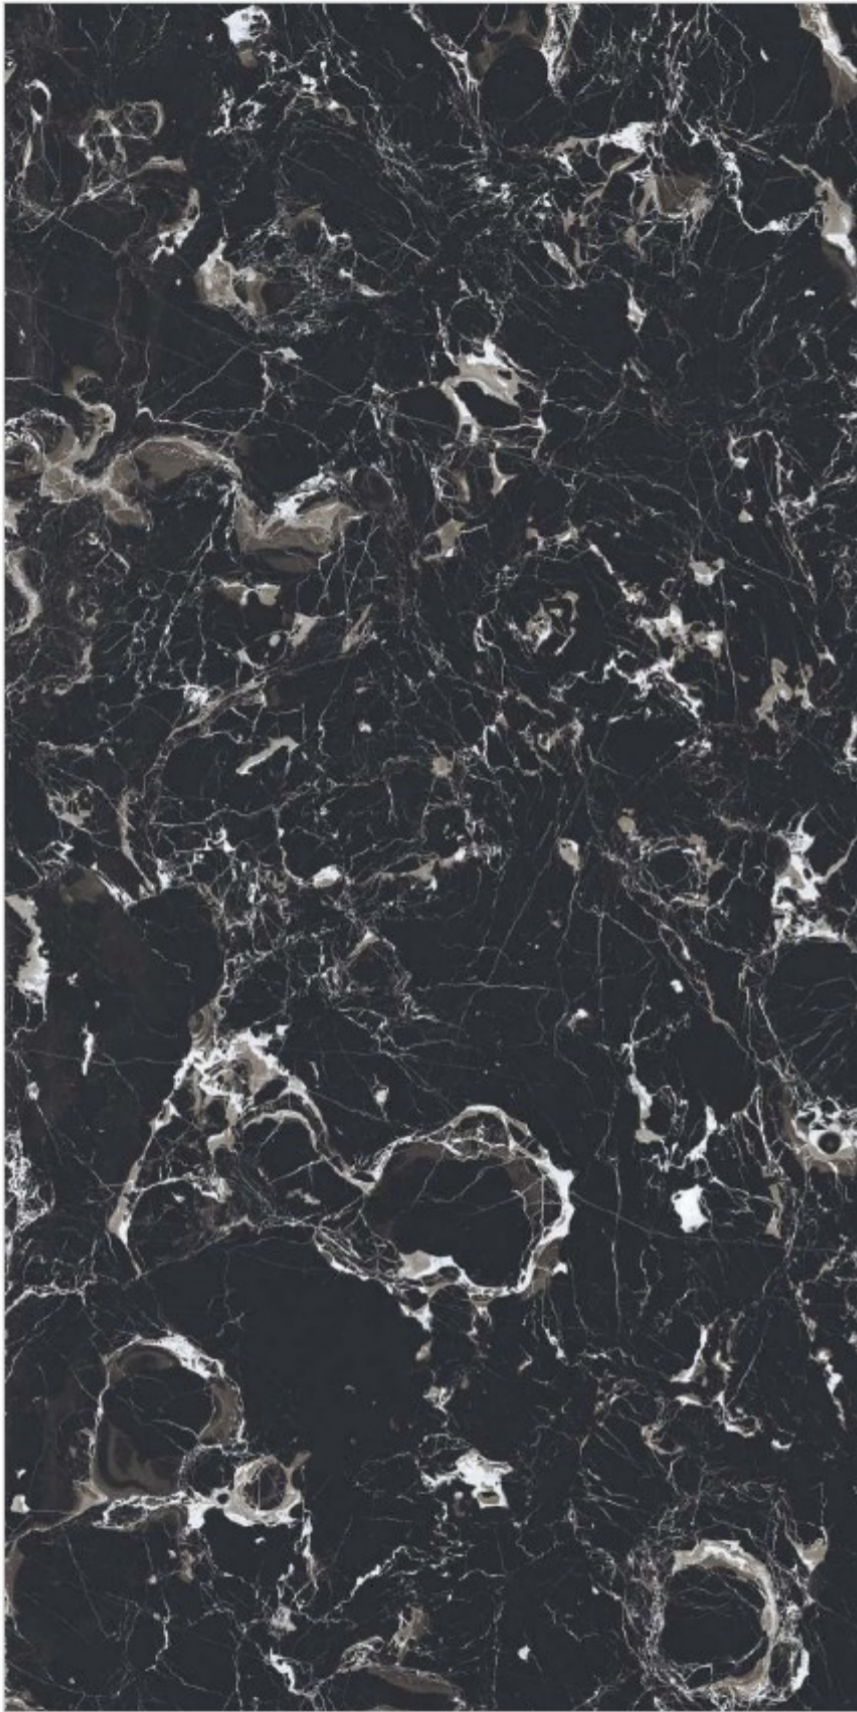


PORTORO SILVER 2 RANDOM

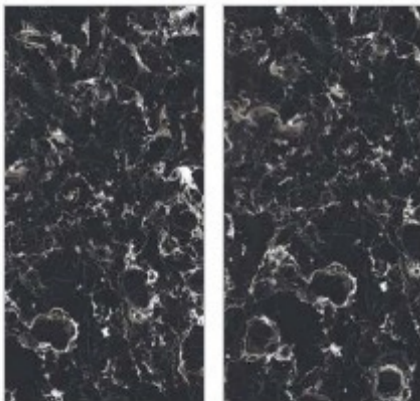

PORTORO GOLD 2 RANDOM

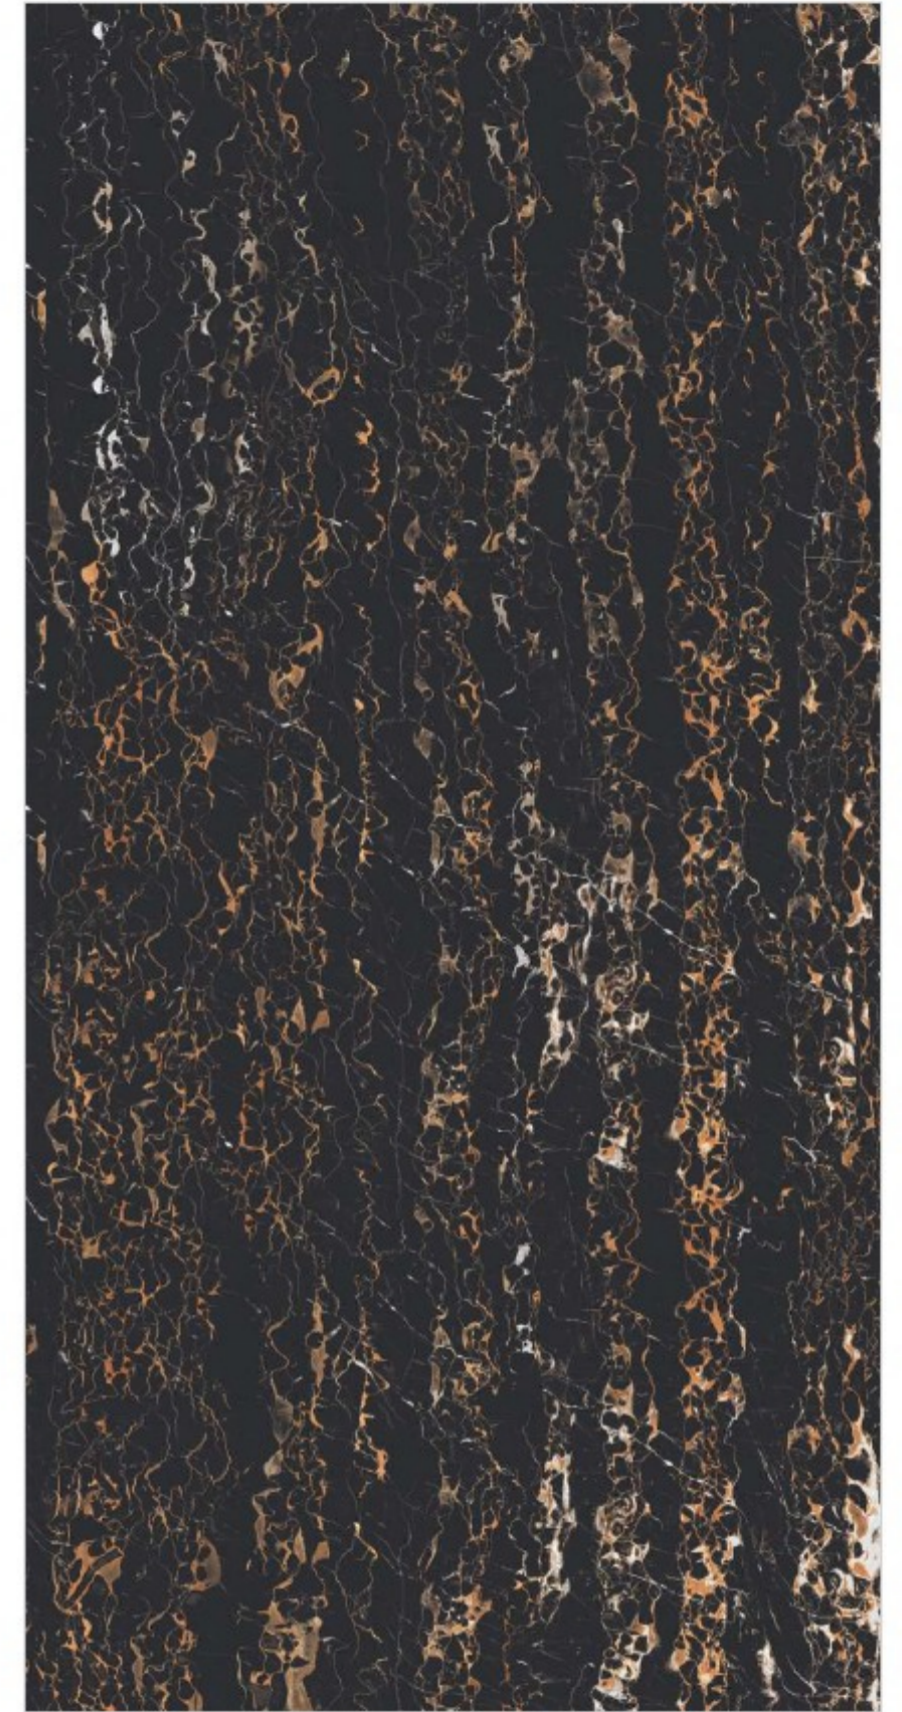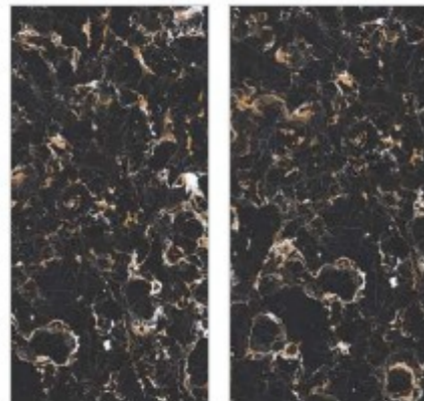

PORTORO 2 RANDOM

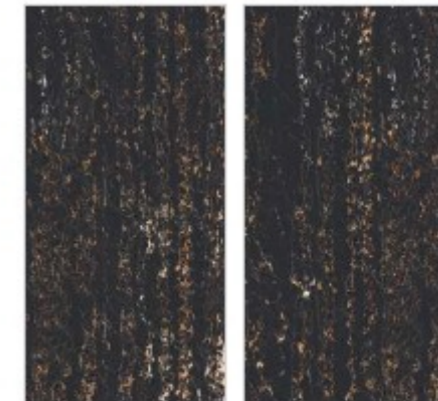



WALL : PORTORO SILVER & ANTIQUE SATVARIO | FLOOR : PORTORO SILVER

1200x
2400mm

MAT FINISH

→ 9mm thickness



ELEGANT CREMA

1 RANDOM



SANDUNE CAFE

1 RANDOM



FLOOR : SANDUNE CAFE

1200x
2400mm

MAT FINISH

9mm thickness



Versatile solutions
Easier to lay
Resistant to chemical
Resistant to loads
Resistant to stains
Wide range



WILLIAM BIANCO 2 RANDOM

DUST 4 RANDOM

TUNA ROCK ICE 2 RANDOM

TUNA ROCK GREY 2 RANDOM






1200x
2400mm

MAT FINISH

→ 9mm thickness



Versatile solutions
Easier to lay
Resistant to chemical
Resistant to loads
Resistant to stains
Wide range

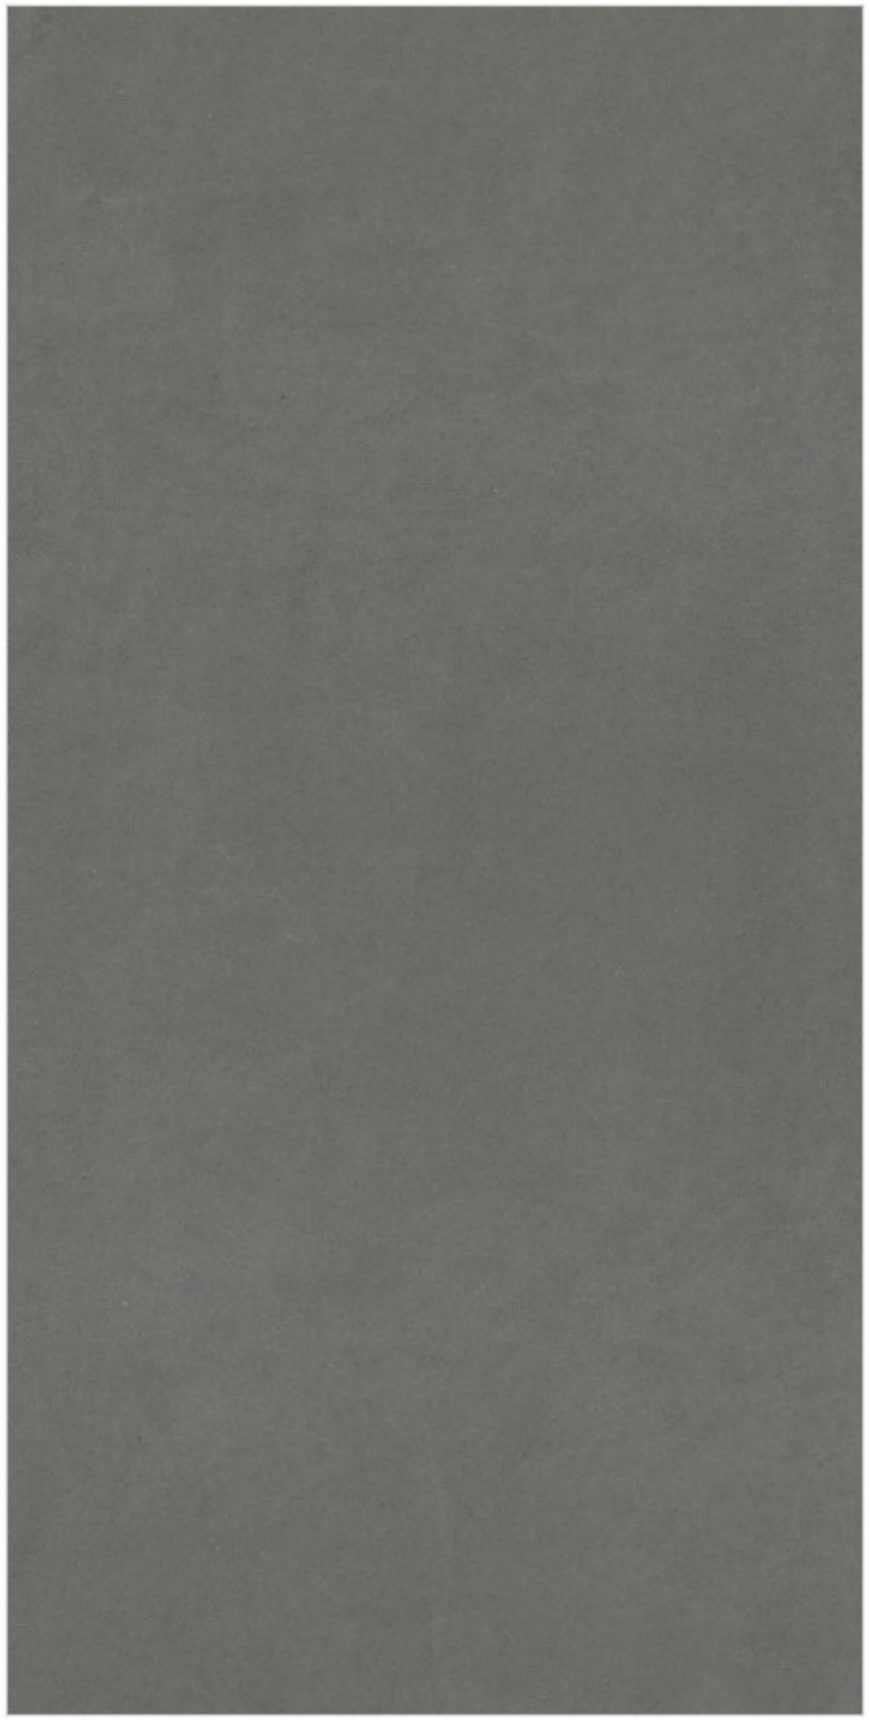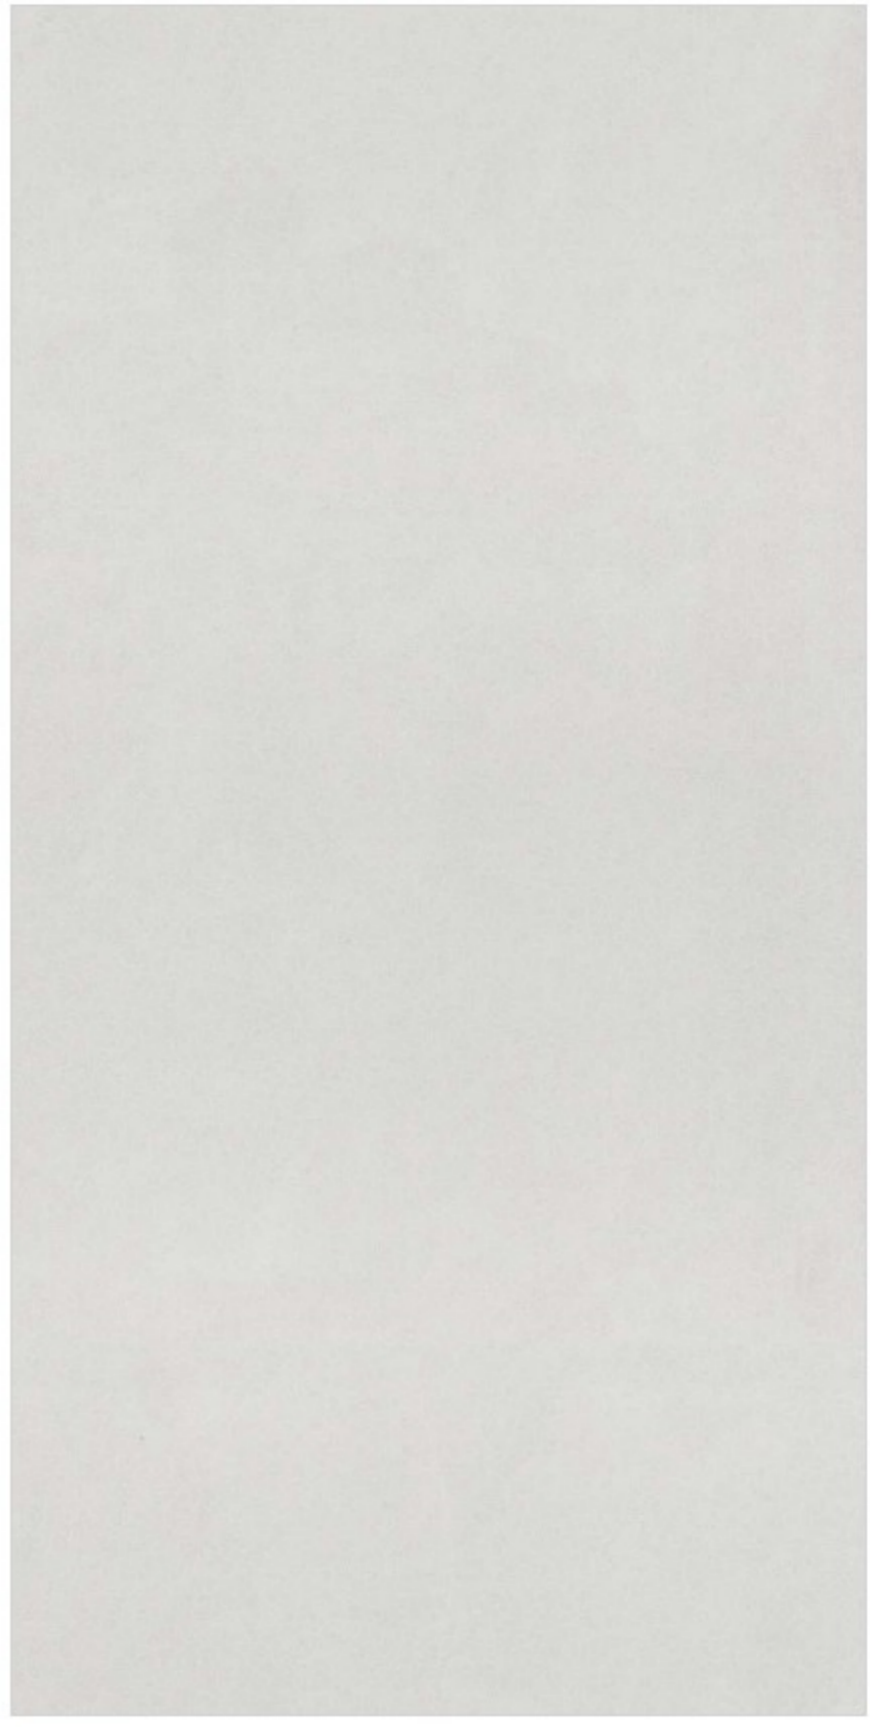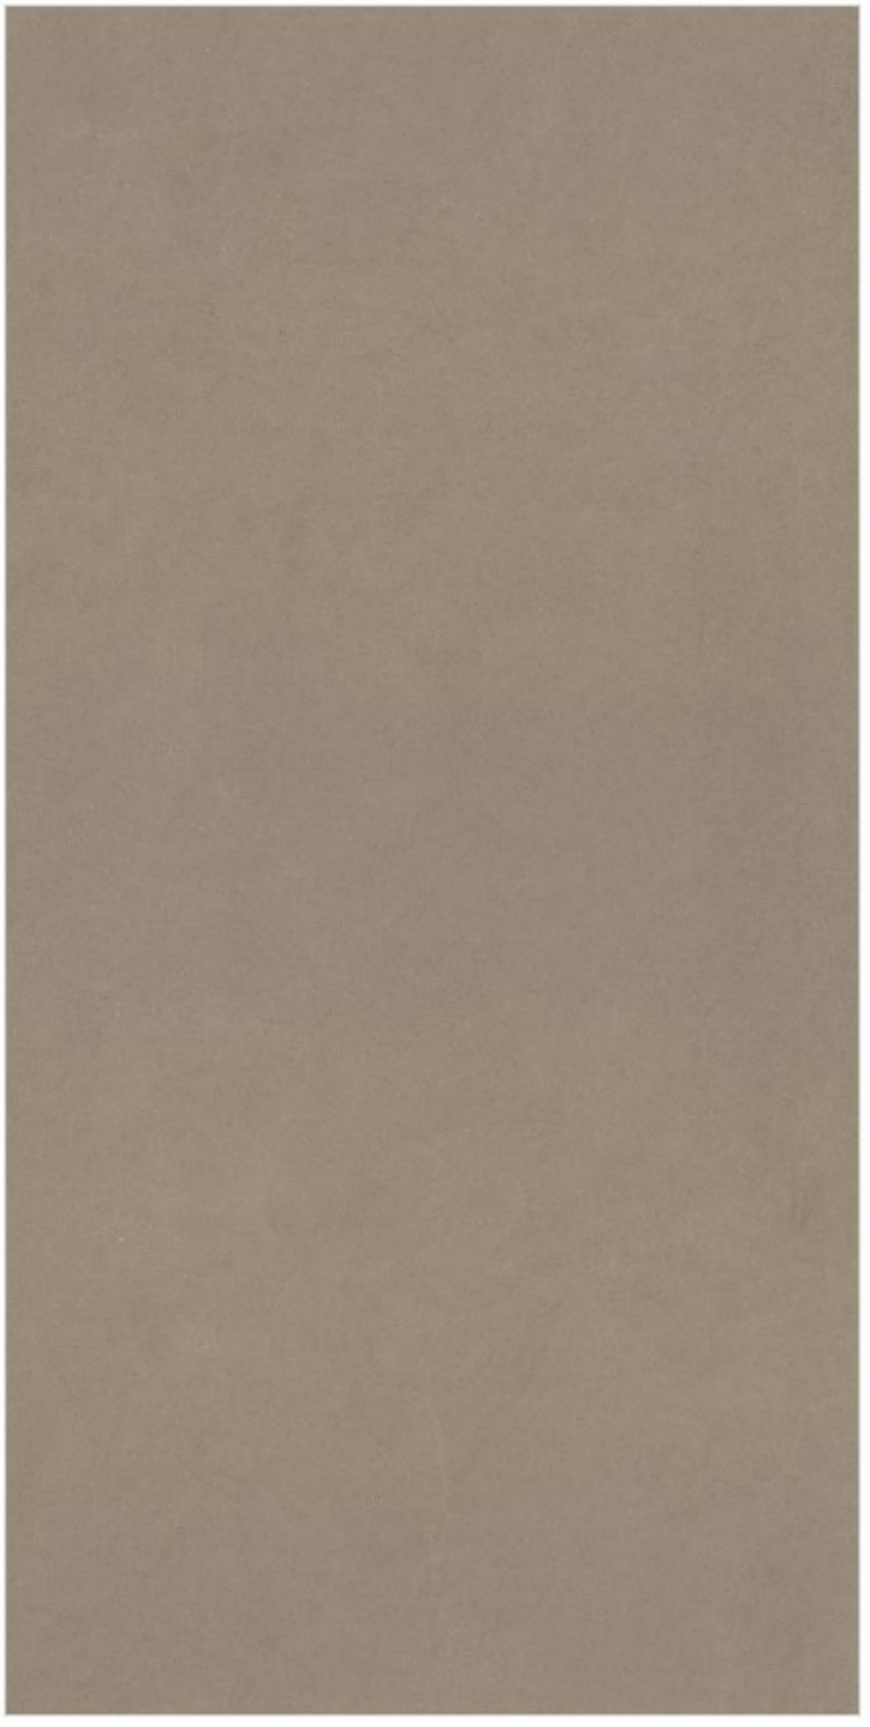

SENTILIA CREMA 1 RANDOM

SENTILIA BROWN 1 RANDOM

SENTILIA ICE 1 RANDOM

SENTILIA GRIS 1 RANDOM





WALL : SENTILIA ICE & SENILIA GRIS | FLOOR : SENTILIA GRIS

1200x
2400mm

CARVING FINISH

→ 9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



TRAVENTINO CREMA 1 RANDOM



CORTEN BEIGE 2 RANDOM



VERANDA BREEZE 1 RANDOM



RUDE METAL 1 RANDOM



1200x
2400mm **CARVING FINISH** → 9mm thickness

-  Versatile solutions
-  Easier to lay
-  Resistant to chemical
-  Resistant to loads
-  Resistant to stains
-  Wide range




BURBERRY BEIGE 2 RANDOM

BURBERRY BROWN 2 RANDOM


BURBERRY GREY 2 RANDOM




1200x
2400mm **CARVING FINISH** → 9mm thickness

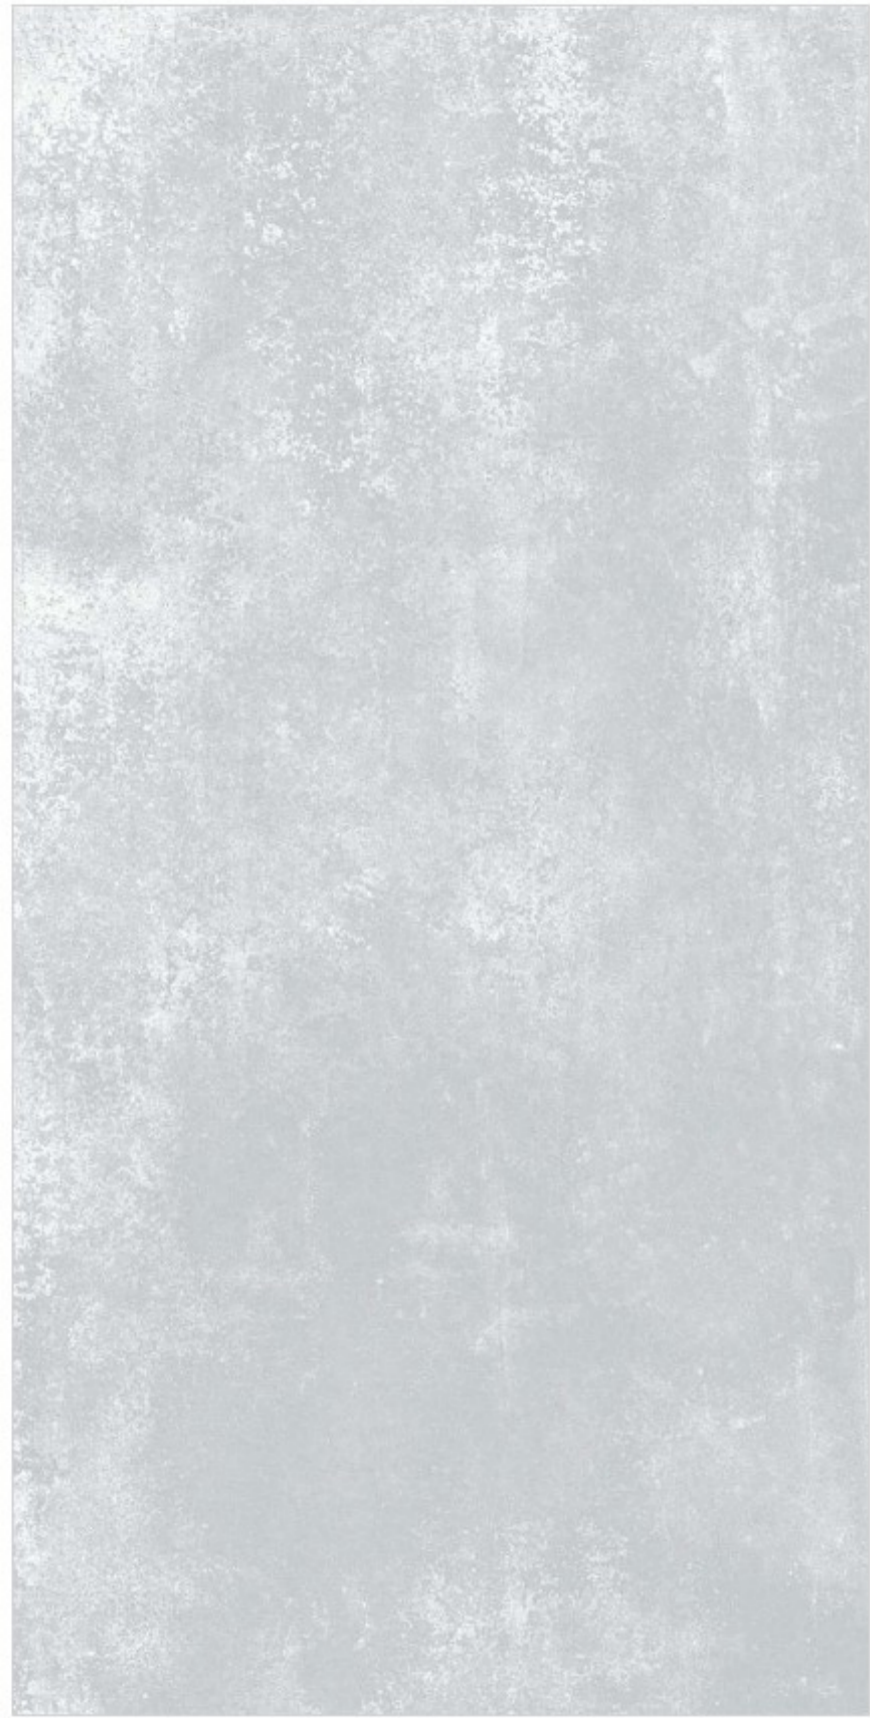

AMMONITE BIANCO 2 RANDOM

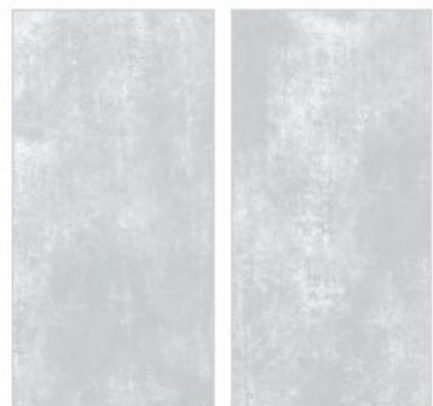

AMMONITE NERO 2 RANDOM

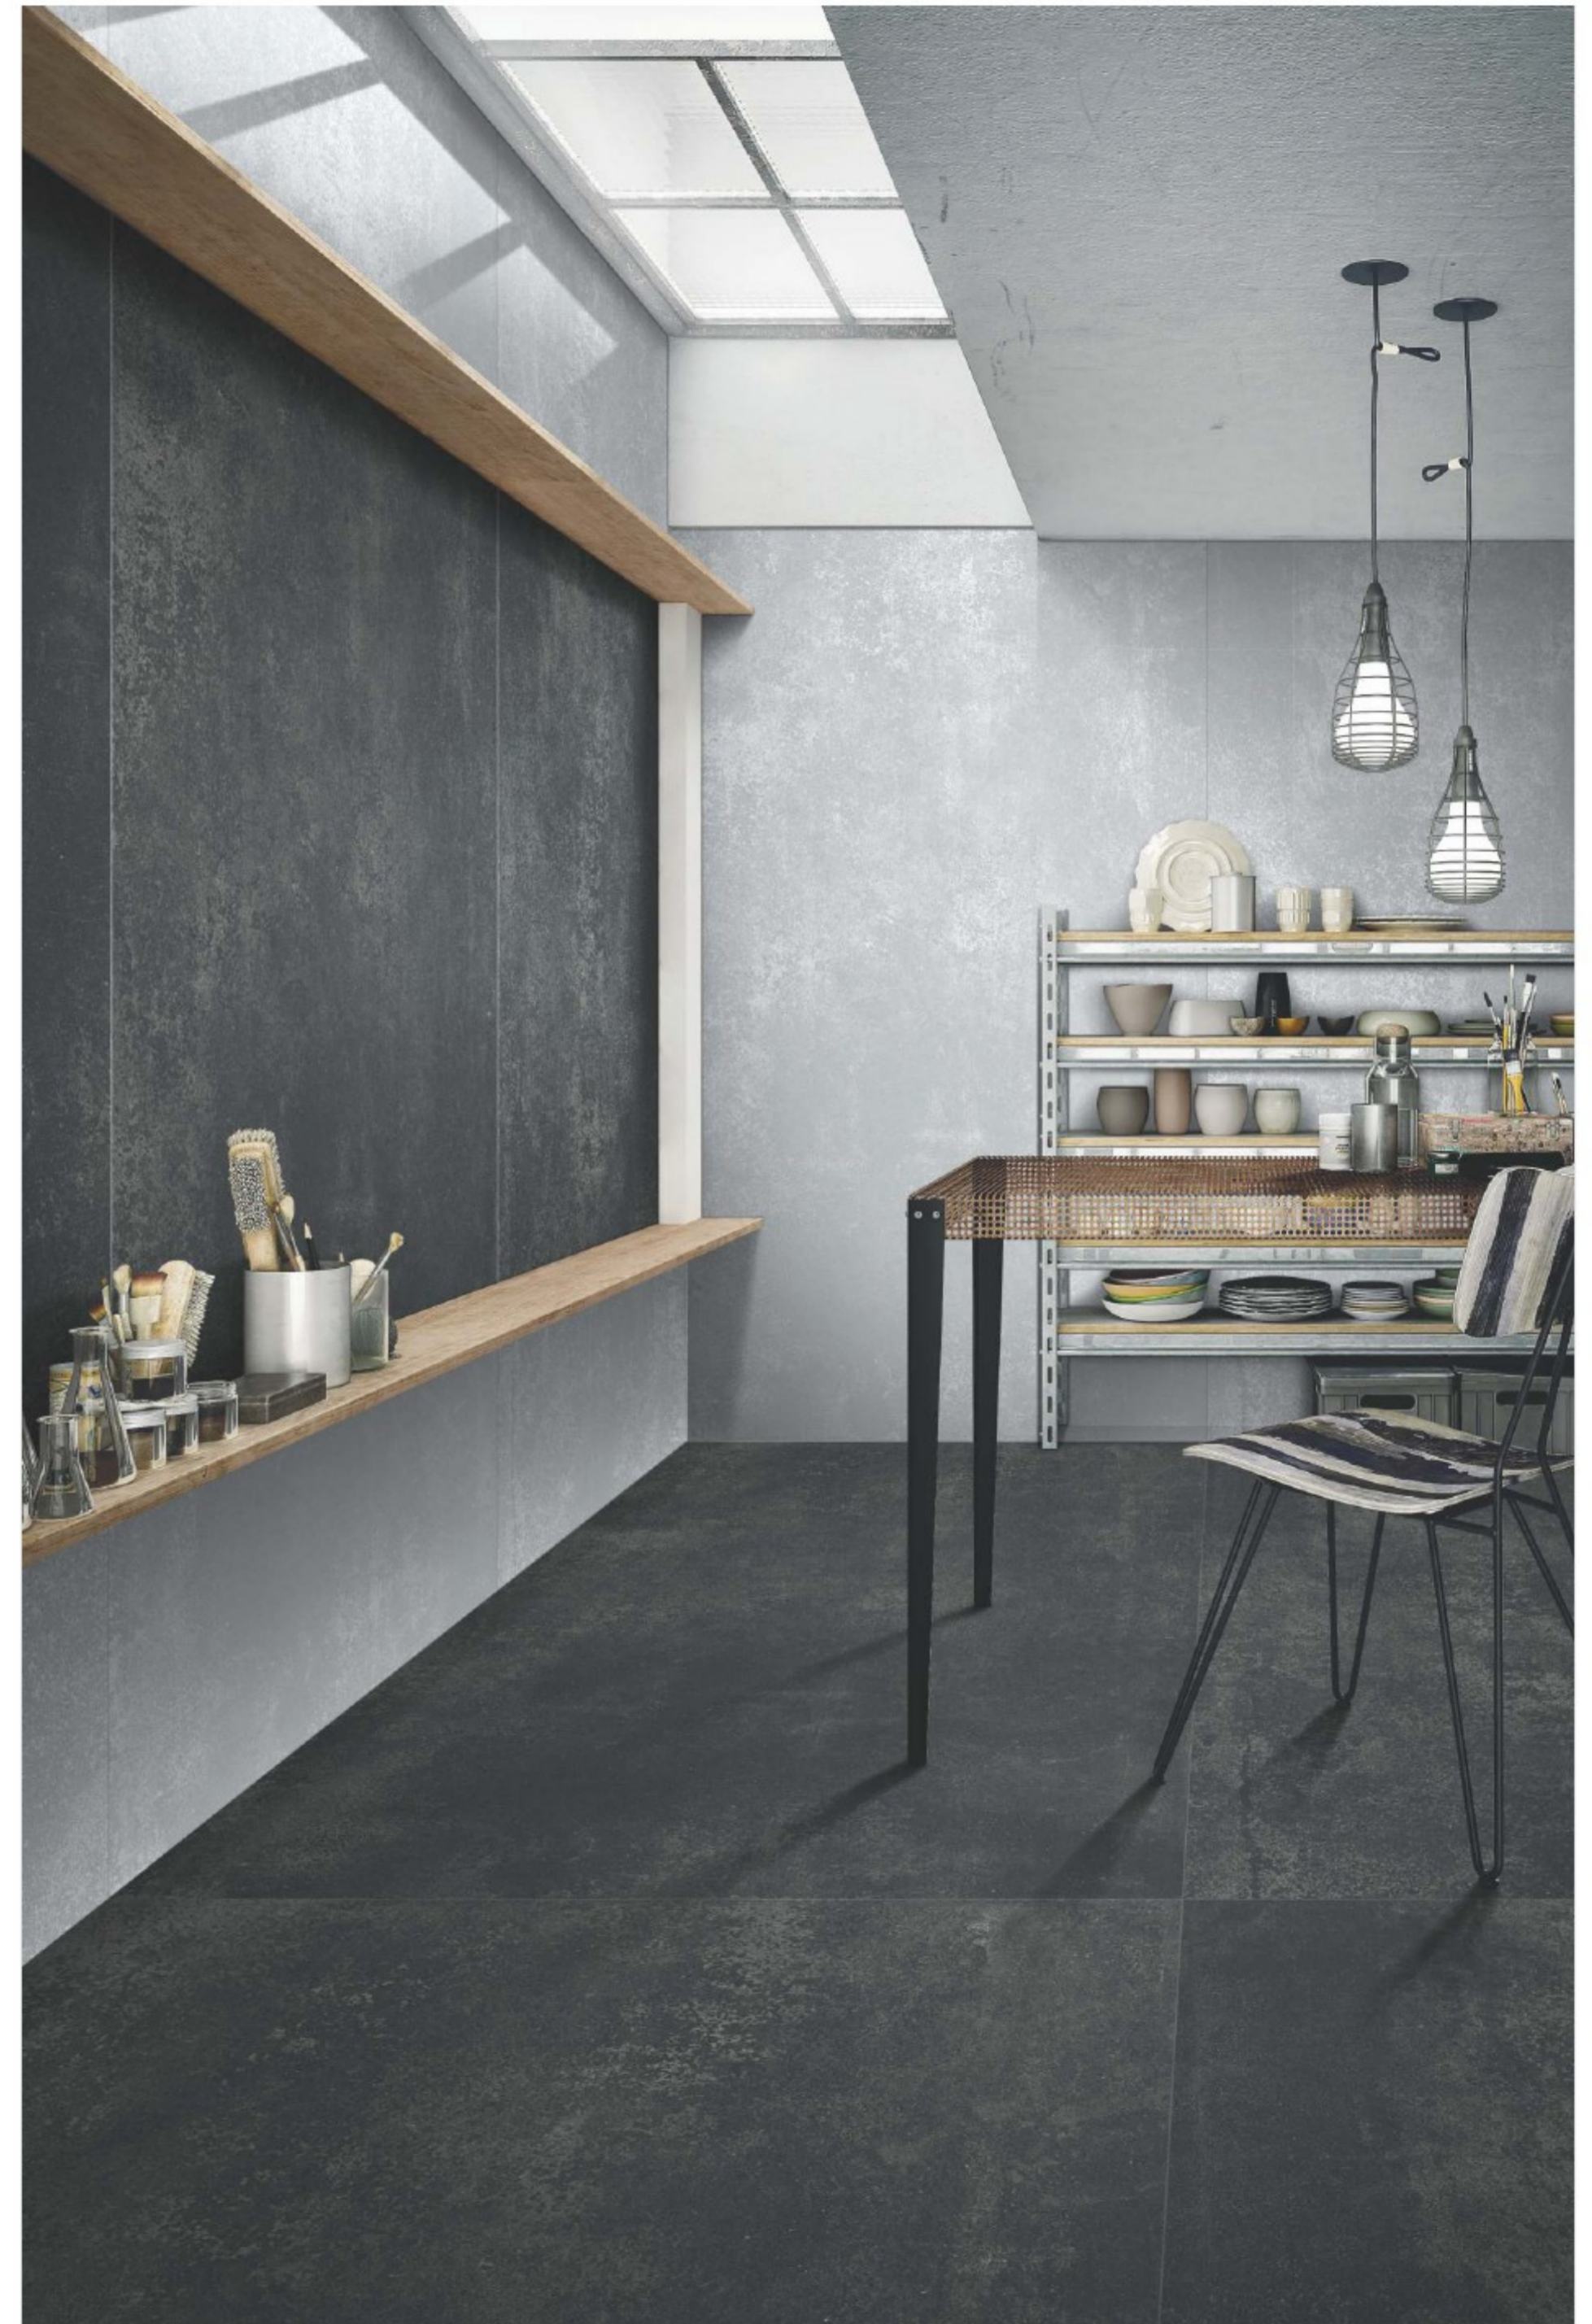

WALL : AMMONITE BIANCO & AMMONITE NERO | FLOOR : AMMONITE NERO

1200x
2400mm **CARVING FINISH** → 9mm thickness



STUCCO BEIGE 2 RANDOM



FLOOR : STUCCO BEIGE

1200x
2400mm

BABY SATIN FINISH

→ 9mm thickness



Versatile solutions
Easier to lay
Resistant to chemical
Resistant to loads
Resistant to stains
Wide range



BRECCIA MARINO LATTE 2 RANDOM

BRECCIA MARINO NATURAL 2 RANDOM

BRECCIA MARINO ASH 2 RANDOM



1200x
2400mm

BABY SATIN FINISH

→ 9mm thickness



PERSIAN BEIGE

2 RANDOM



FLORENTINE CREMA

2 RANDOM



WALL : PERSIAN BEIGE | FLOOR : SANDUNE CAFE

TECHNICAL SPECIFICATION OF SLAB VITRIFIED TILE

TEST DESCRIPTION			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	EUPHORIA VALUE
Deviation In Length	Is-13630-1	±0.10%	±0.05%
Deviation in Width	Is-13630-1	±0.10%	±0.05%
Deviation in Thickness	Is-13630-1	±5.0%	±3.00%
Straightness of Sides	Is-13630-1	±0.10%	±0.10%
Rectangularity	Is-13630-1	±0.10%	±0.10%
Surface Flatness	Is-13630-1	±0.50%	±0.2%
Surface Quality	Is-13630-1	Min. 95%	Min. 95%

PHYSICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	OUR VALUE
Water Absorption	Is-13630-2	≥0.06% Avg.	0.04% Avg.(±0.02%)
Modulus of Rapture(N/mm ²)	Is-13630-6	Avg. 35N/mm ²	Avg. 42N/mm ²
Breaking Strength(N)	Is-13630-6	<7.5mm-700n ≥7.5mm-1300n	<6mm-1200n ≥6mm-1350n
Moisture Expansion(mm/m)	Is-13630-3	0.02 Max	0.01 Max
Scratch Hardness of Surface	Is-13630-13	8 Min	4-4.5
Resistance of Surface Abrasion(Glazed Tiles)	Is-13630-11	Class I Min.	Class I Min.
Co-Efficient of Linear Thermal Expansion	Is-13630-4	6x10 ⁻⁶ Max	6.5x10 ⁻⁶ Max.
Thermal Shock Resistance	Is-13630-5	10 Cycles Min.	10 Cycles, Pass
Crazing Resistance	Is-13630-9	4 Cycles at 7.5 Bar Min.	5 Cycles at 7.5kg Pressure
Impact Resistance-Coefficient of Restitution	Is-13630-14	0.55 Min.	0.55 Min
Frost Resistance	Is-13630-10	According to Manufacturing Process	No Damage
Bulk Density (g/cc)	Is-13630-2	2.2 Min.	2.3
Penalty (Curvature)	-	±1.0%	±0.6%

CHEMICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	OUR VALUE
Resistance of Staining	Is-13630-8	Class I Min.	Class I
Resistance of Household Chemicals	Is-13630-8	Class AA Min.	Class AA
Resistance to Acids & Alkalis	Is-13630-8	According to Manufacturing Process	Resistance
Slip Resistance	150-18006/EN1444 Group BIA	As pr Mfg.	>0.40

PACKING DETAIL


No.	Size	Thickness (approx.)	Pieces/Box	Area/Box	Wt./Box(approx.)
01	1200x2400mm	9.0mm	1 pcs.	2.88 sq. mtr.	60 Kgs.

SLAB LAYING INSTRUCTIONS

- Plaster the surface of the floor to be tiled smooth and complete the plastering and curing at least two hour prior to tiling.
- Before fixing SLAB, lay them out in desired pattern and make sure that give acceptable blend of colour. Please note that certain amount of shade variation is inherent in the manufacture of a fully vitrified ceramic tile. THE COMPANY WILL BEAR NO LIABILITY AFTER THE TILES ARE FIXED.
- For fixing SLAB, we recommend the use of the tile fixing adhesive for best result. Also follow the tile fixing instructions provided along with adhesives.
- For fixing SLAB on the floor using sand and cement follow the instructions given below:
 - Use cement and sand mortar in the ratio of 1:4 add some water to create a consistent paste.
 - Once the mixing has been completed do not add any further water to create a consistent paste.
 - Apply a 20-30mm layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and dull bedding. Press gently for even adherence at the back of the tile. DO NOT USE IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILES.
- For fixing SLAB on dado, we recommend the use of adhesive. Please follow the manufacture's instructions for the same. We do not recommend the use of sand and cement for fixing on dado.
- Mark and layout the tiles from the center of the area to be tiled so that cut tiles. If any will be on the outer edges to words the walls.
- The work size which we try to maintain for better technical performance is 1200x2400mm, 800x2400mm, 900x1800mm, 800x1600mm, & 1200x1200mm on average. It is advisable to maintain a gap of 1mm to 3mm between every two tile to allow for possible expansion as per BIS/EN tolerance norms. This would give the coverage area as mentioned in the cartoon.
- Complete the tile laying process by pressing the center of the SLAB firmly into place along the walls/floors.
- Allow 3-4 days for bed curing. After this period fill the joints with grouts.
- Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tile with a soft and dry cloth for a clean surface. The tile can also be cleaned by mild acid (however hydrofluoric acid and its derivatives should not be used)
- Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

TILING POSSIBILITIES

800X1600MM

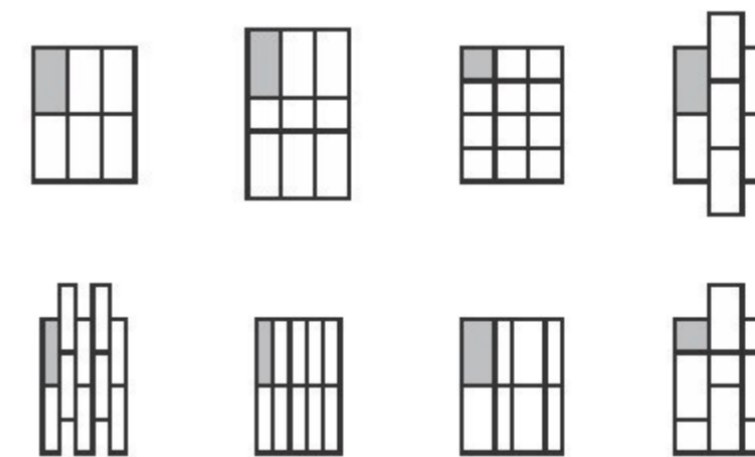

1200X1200MM

